

LOC I-BPM <u>111.9</u>	APP CRS 133°	Rwy Ldg TDZE Apt Elev	7000 1031 1031
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 13
ST CLOUD RGNL (STC)


DME required.

T For inop ALS when using Little Falls alimeter setting, increase S-ILS-13 all Cats visibility to $\frac{3}{8}$ SM. When local alimeter setting not received, use Little Falls alimeter setting, increase DA to 1307 feet; increase all MDAs 80 feet and S-LOC 13 visibility Cats C and D $\frac{1}{8}$ SM, and Circling visibility Cats C and D $\frac{1}{4}$ SM. For inop ALS, increase S-LOC 13 Cats C and D visibility to $1\frac{3}{4}$ SM. DME from STC VOR/DME. DME use requires simultaneous reception of I-BPM and STC DME. VDP NA when using Little Falls alimeter setting.

MALSR

MISSED APPROACH: Climb to 2500 then climbing left turn to 5000 direct STC VOR/DME and on STC VOR/DME R-312 to SIYON/STC 14.5 DME and hold.

ATIS 119.375	MINNEAPOLIS CENTER 121.05 235.775	ST. CLOUD TOWER ★ 118.25 (CTAF) 0	GND CON 123.75
-----------------------------------	--	--	-------------------------------------

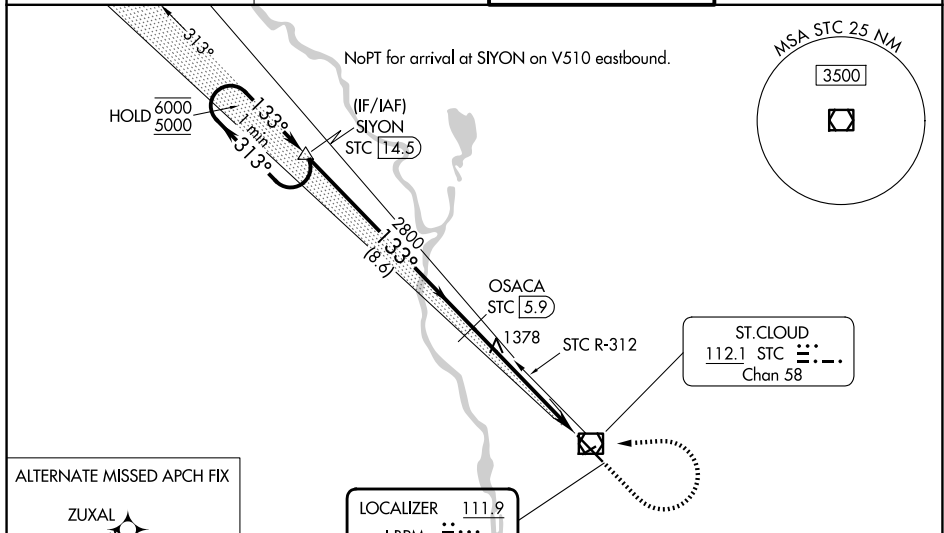

NC-1, 27 NOV 2025 to 25 DEC 2025

