

WAAS CH 49215 W18A	APP CRS 176°	Rwy Idg TDZE 842 Apt Elev 864	5005 842 864
--	------------------------	---	---

RNAV (GPS) RWY 18


BRIDGEPORT MUNI (XBP)

RNP APCH.

Baro-VNAV and VDP NA when using Decatur altimeter setting. Rwy 18 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Decatur altimeter setting and increase LPV DA to 1342 feet and LNAV/VNAV DA to 1423 feet; increase all MDAs 60 feet.

MISSED APPROACH: Climb to 3600 direct FIPAL and on track 241° to TIEON and hold, continue climb-in-hold to 3600.

AWOS-3PT 119.225	FORT WORTH CENTER 127.0 360.6	UNICOM 123.0 (CTAF)
----------------------------	---	-------------------------------

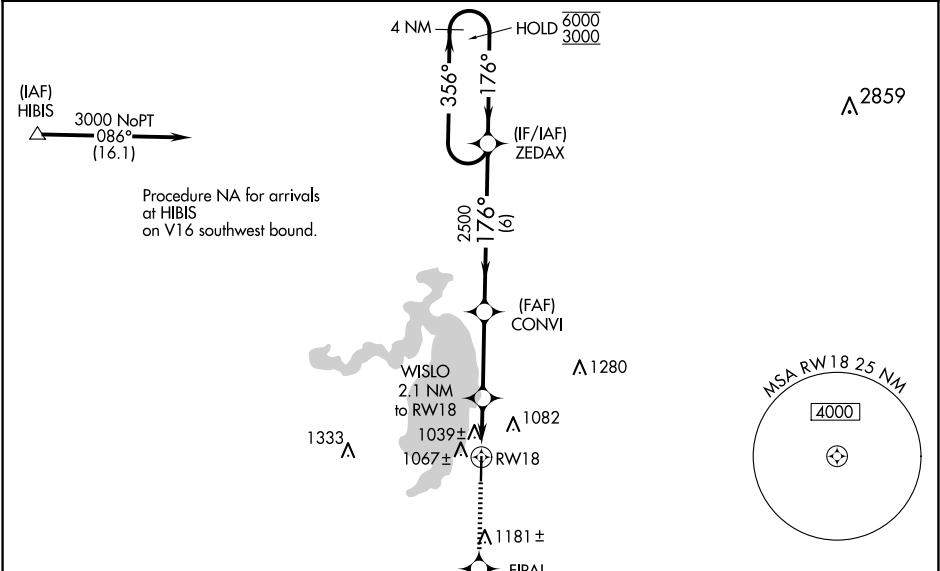

3600

FIPAL

tr 241°

TIEON

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 51).

*LNAV only.

3600

FIPAL

tr 241°

TIEON

WISLO 2.1 NM to RW18

CONVI

ZEDAX

4 NM Holding Pattern

6000

3000

GP 3.00° TCH 40

1.4

0.7

3.1 NM

6 NM

1520*

2500

CATEGORY	A	B	C	D
LPV DA	1285-1 ½ 443 (500-1 ½)		NA	
LNAV/VNAV DA	1366-2 524 (600-2)		NA	
LNAV MDA	1300-1 458 (500-1)		NA	
CIRCLING	1480-1 616 (700-1)		NA	

MIRL Rwy 18-36

BRIDGEPORT, TEXAS

Orig-B 08OCT20

33°10'N-97°50'W

BRIDGEPORT MUNI (XBP)

RNAV (GPS) RWY 18