

APP CRS	Rwy Ldg	4098
002°	TDZE	619
	Apt Elev	619

RNAV (GPS) RWY 36
SHELBY COUNTY (2H0)


RNP APCH - GPS.


T Circling NA to Rwy 4, 14, 22, and 32. Use Decatur altimeter setting, when not received use Maatloon/Charleston altimeter setting and increase all MDAs 20 feet, and Circling Cat C visibility $\frac{1}{4}$ SM. Rwy 36 helicopter visibility reduction below 1 SM NA. Straight-in and Circling Rwy 36 NA at night.

MISSED APPROACH:
Climbing left turn to 2400
direct EROXY and hold.

DEC ASOS 126.35	KANSAS CITY CENTER 124.3 269.15	UNICOM 122.8 (CTAF) 0
---------------------------	---	---------------------------------

Procedure NA for arrival on AXC VORTAC
airway radials 098 CW 217.

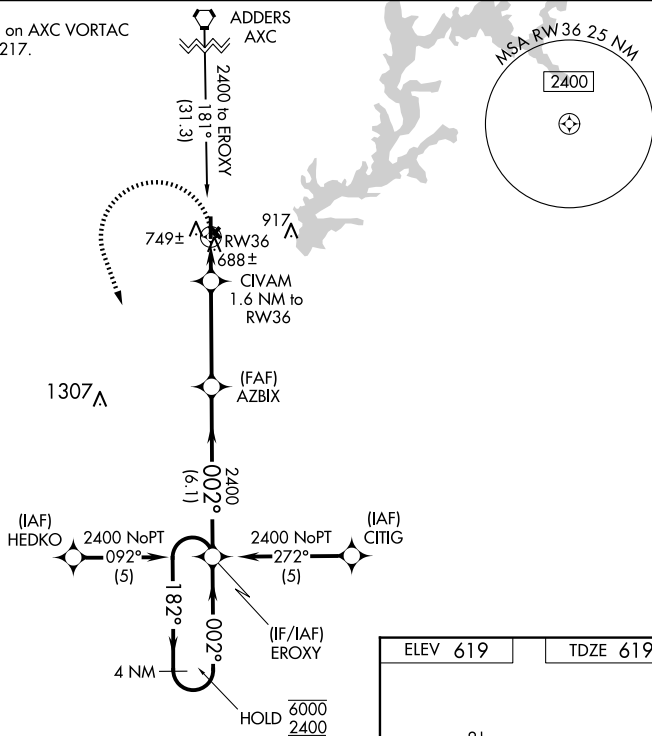

4 NM Holding Pattern		VGSI and descent angles not coincident (VGSI Angle 4.00/TCH 29).		2400 	EROXY 
6000 2400	←182° 002°→	002°	2400	3.04° TCH 40	CIVAM 1.6 NM to RW36
				1160	RW36 
				1.6 NM	

CATEGORY	A		B		C		D
LNAV MDA	1080-1	461 (500-1)			1080-1 ³ / ₈ 461 (500-1 ³ / ₈)		NA
C CIRCLING	1280-1	661 (700-1)			1340-2 721 (800-2)		NA

