

WAAS CH 72827 W09A	APP CRS 088°	Rwy Ldg TDZE Apt Elev	4218 1021 1021
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 9
UNION COUNTY (MRT)

RNP APCH - GPS.

When Circling to Rwy 27 at night, operational VGSi required, remain on or above VGSi glidepath until threshold. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Circling NA to Rwy 8 and 26.

MISSED APPROACH: Climb to 3000 direct NESWU and hold.

AWOS-3 119.275	COLUMBUS APP CON 125.95 317.775	UNICOM 123.05 (CTAF)
--------------------------	---	--------------------------------

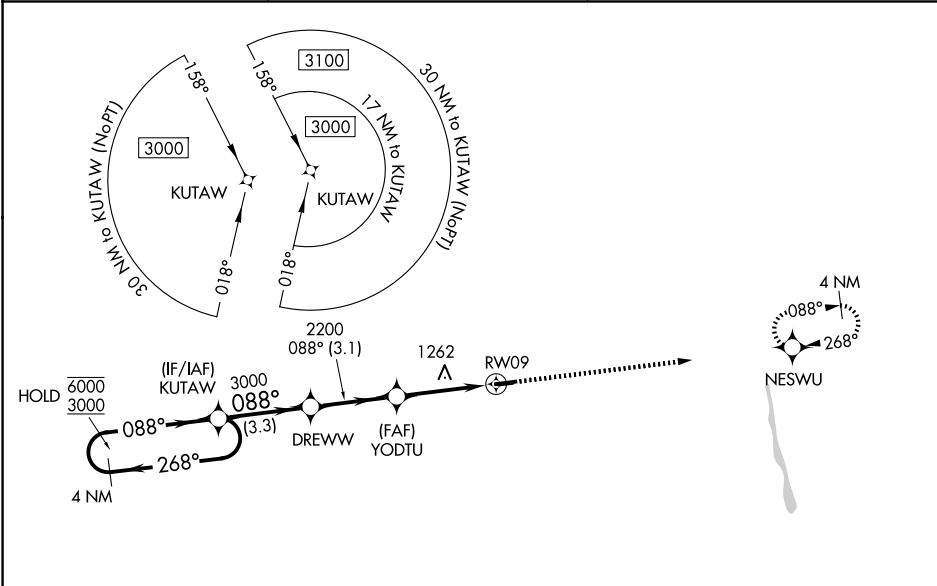

ELEV 1021

TDZE 1021

4 NM Holding Pattern

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 25).

3000 NESWU

KUTAW DREWW YODTU

6000 3000 268° 088° 088° 3000 088° 2200 1.5 NM to RWY 09

GP 3.00° TCH 40

3.3 NM 3.1 NM 2.1 NM 1.5 NM

CATEGORY	A	B	C	D
LPV DA	1285-7/8 264 (300-7/8)			
LNAV/VNAV DA	1432-1 1/8 411 (500-1 1/8)			
LNAV MDA	1520-1 499 (500-1)	1520-1 3/8 499 (500-1 3/8)		
CIRCLING	1520-1 499 (500-1)	1540-1 519 (600-1)	1620-1 1/2 599 (600-1 1/2)	1620-2 599 (600-2)

MIRL Rwy 9-27

REIL Rwy 9 and 27

EC-2, 27 NOV 2025 to 25 DEC 2025

EC-2, 27 NOV 2025 to 25 DEC 2025