

WAAS CH 45800 W16A	APP CRS 163°	Rwy Idg 5500 TDZE 1202 Apt Elev 1204
--	------------------------	---

RNAV (GPS) RWY 16


PLATTSMOUTH MUNI/DOUGLAS V DUEY FLD (PMV)

- A** When local altimeter setting not received, use Offutt AFB altimeter setting, increase all DAs 45 feet and all MDAs 60 feet, increase LNAV/VNAV all Cats visibility 1/2 mile. VDP NA when using Offutt AFB altimeter setting. Baro-VNAV NA when using Offutt AFB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2800
direct AVFAL and hold.

AWOS-3 118.975	OMAHA APP CON 135.875 354.05	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

Procedure NA for arrivals at MEPWE
via V138 southwest bound.

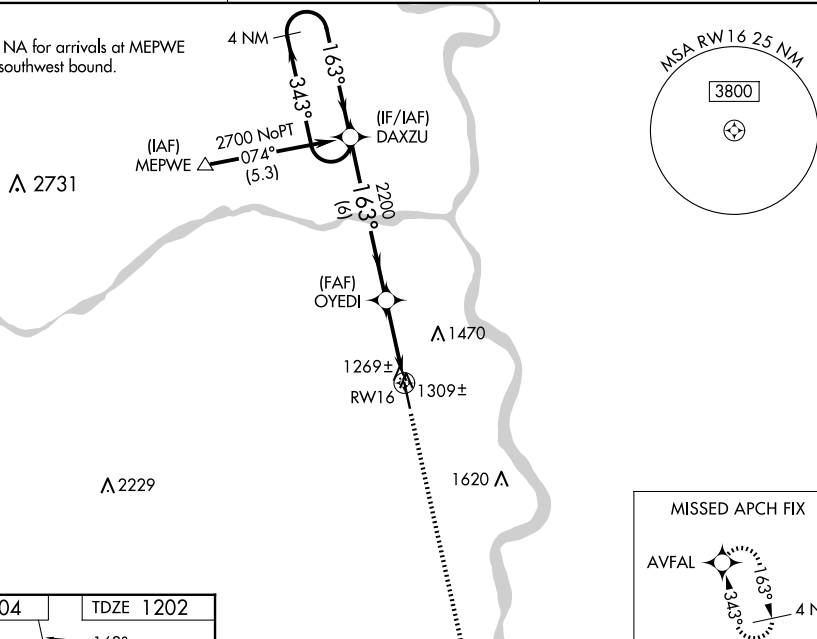

MISSED APCH FIX

ELEV 1204

TDZE 1202

163°

0.3% UP

5500 X 100

34

MIRA Rwy 16-34

REIL Rwy 16 and 34

4 NM Holding Pattern

2700

343°

163°

DAXZU

OYEDI

2200

163°

*1 NM to RW16

RW16

*LNAV only.

GP 3.00° TCH 39

6 NM

2 NM

1 NM

CATEGORY	A	B	C	D
LPV DA	1452-1	250 (300-1)	NA	
LNAV/VNAV DA	1539-1½	337 (400-1½)	NA	
LNAV MDA	1560-1	358 (400-1)	NA	
CIRCLING	1640-1 436 (500-1)	1660-1 456 (500-1)	NA	