

LOC/DME I-BBG	APP CRS	Rwy Ldg
111.35	323°	7140
Chan 50(Y)		TDZE 1302
		Apt Elev 1302

ILS or LOC RWY 32
BRANSON (BBG)


NA

Inop table does not apply. When local altimeter setting not received, use Harrison altimeter setting and increase S-ILS 32 DA to 1549 feet; increase all MDAs 60 feet and S-LOC 32 visibility Cat C/D and Circling visibility Cat C ¼ SM. VDP NA when using Harrison altimeter setting.

MALSF

MISSED APPROACH: Climb to 4000 on heading 315° and HRO VOR/DME R-339 to WUTIB INT/HRO 25.3 DME and hold.

ATIS 124.625	SPRINGFIELD APP CON 126.35	BRANSON TOWER★ 128.15 (CTAF) 0	GND CON 118.4	UNICOM 122.95
-----------------	-------------------------------	-----------------------------------	------------------	------------------

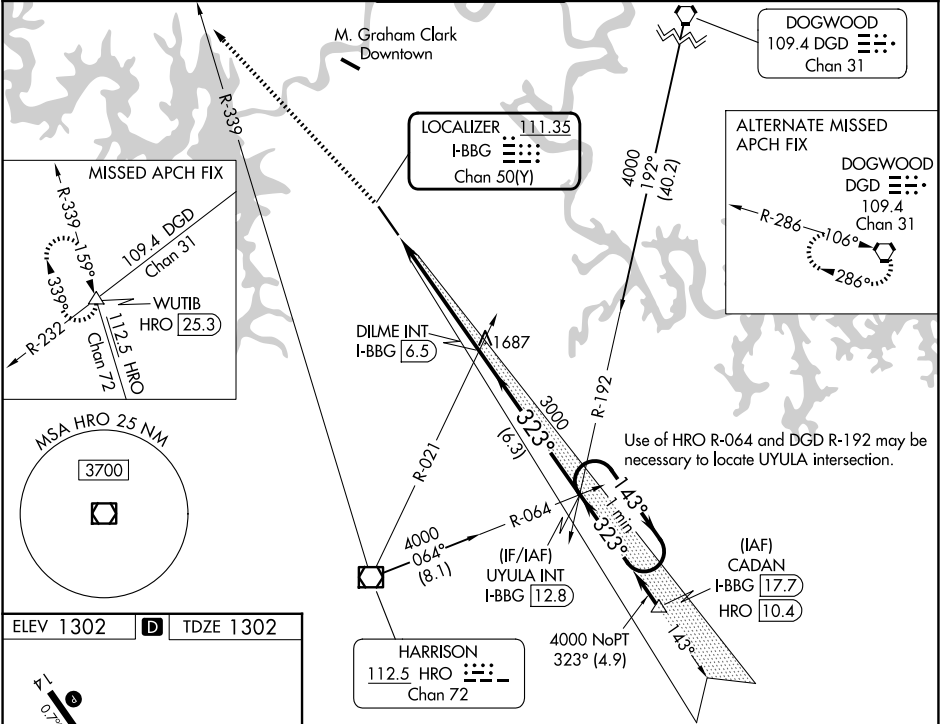

ELEV 1302 TDZE 1302

D

TWR ☆

REIL Rwy 14

HIRL Rwy 14-32

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

4000 ↑ hdg 315°		HRO R-339	WUTIB △		DILME INT I-BBG (6.5)		UYULA INT I-BBG (12.8)	One Minute Holding Pattern	
*LOC only.		*I-BBG (1.4)		3000		323°		4000	
1.3 NM		3.8 NM		6.3 NM		GS 3.00° TCH 50			
CATEGORY	A		B		C		D		
S-ILS 32	1502-1		200 (200-1)						
S-LOC 32	1760-1		458 (500-1)						
CIRCLING	1760-1 458 (500-1)	1900-1 598 (600-1)	2220-2¾ 918 (1000-2¾)	2220-3 918 (1000-3)					

NC-3, 27 NOV 2025 to 25 DEC 2025

NC-3, 27 NOV 2025 to 25 DEC 2025