

WAAS CH 99418 W35A	APP CRS 355°	Rwy Idg TDZE 2563 Apt Elev 2573
--	------------------------	---

RNAV (GPS) RWY 35


BIG SPRING/MC MAHON-WRINKLE (BPG)

RNP APCH.

Baro-VNAV NA when using Midland Intl Air and Space Port altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 43°C. VDP NA with Midland Intl Air and Space Port altimeter setting. When local altimeter setting not received, use Midland Intl Air and Space Port altimeter setting: increase all DA 130 feet and all MDA 140 feet; increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ½ SM and LNAV Cat C and D visibility ½ SM.

MISSED APPROACH: Climb to 5200 direct YALUT and hold.

AWOS-3PT 118.025	FORT WORTH CENTER 133.7 350.2	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

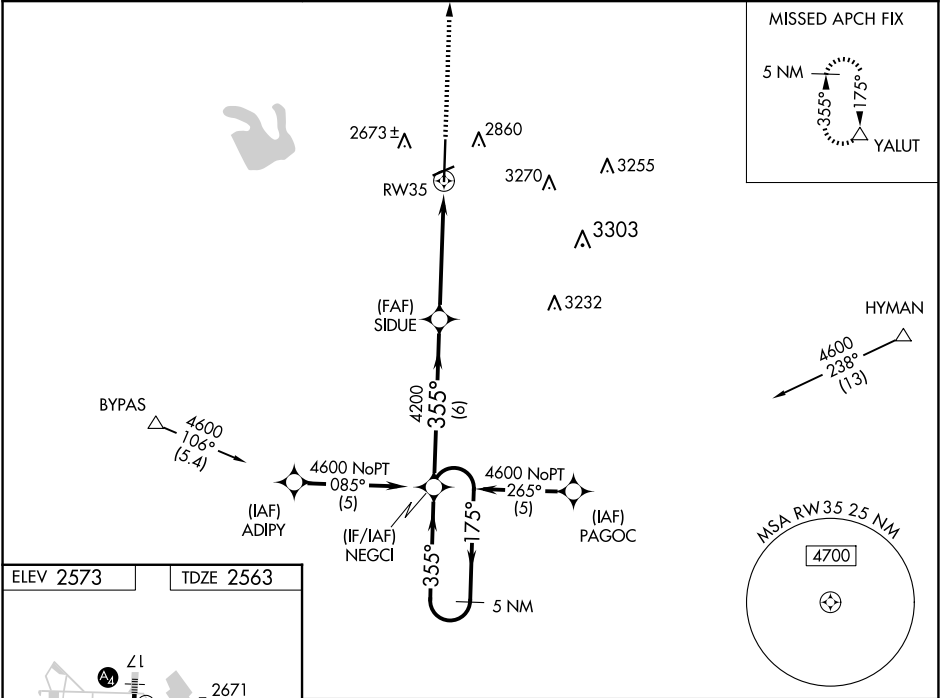

5 NM Holding Pattern

NEGCI

SIDUE

GP 3.00° TCH 36

4200

RW35

YALUT

*LNAV only.

*1.5 NM to RW35

6 NM 3.5 NM 1.5 NM

35°

175°

355°

355°

355°

35

4601

8803 X 100

0.6% UP

0.3% UP

MIRL Rwy 6-24 and 17-35

CATEGORY	A	B	C	D
LPV DA	2813-1 250 (300-1)			
LNAV/VNAV DA	2979-1½ 416 (500-1½)			
LNAV MDA	3060-1	497 (500-1)	3060-1¼ 497 (500-1¼)	3060-1½ 497 (500-1½)

SC-2, 25 DEC 2025 to 22 JAN 2026

SC-2, 25 DEC 2025 to 22 JAN 2026