

WAAS CH 56421 W10A	APP CRS 102°	Rwy ldg 4184 TDZE 430 Apt Elev 437
--	------------------------	---

RNAV (GPS) RWY 10

MACON DOWNTOWN (MAC)


▼

▲ NA

Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Middle Georgia altimeter setting, when not received, use Robbins AFB altimeter setting and increase LPV DA to 726 feet, increase LNAV/VNAV DA to 833 feet and increase all MDA 20 feet.

MISSED APPROACH:
Climb to 3000 direct
JOBRA and hold.

MCN ASOS 120.775	ATLANTA APP CON ★ 124.2 279.6	UNICOM 123.0 (CTAF) 0
----------------------------	---	---------------------------------

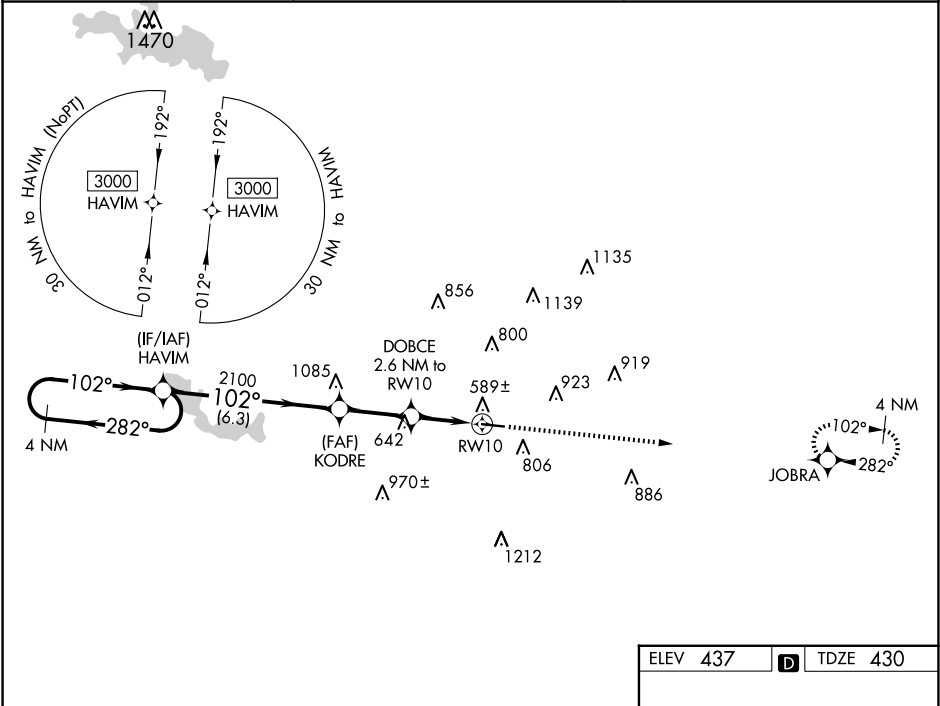

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 23).		3000	JOBRA
3000		KODRE 2100		DOBCE 2.6 NM to RW10	*LNAV only.
GP 3.00° TCH 40		2100		RW10	
		6.3 NM		2.6 NM	
				2.6 NM	
CATEGORY	A	B	C	D	
LPV DA	712-1		282 (300-1)		
LNAV/VNAV DA	819-1 $\frac{3}{8}$		389 (400-1 $\frac{3}{8}$)		
LNAV MDA	880-1 450 (500-1)		880-1 $\frac{3}{8}$ 450 (500-1 $\frac{3}{8}$)		
CIRCLING	1200-1 763 (800-1)		1320-2 $\frac{3}{4}$ 883 (900-2 $\frac{3}{4}$)		1480-3 1043 (1100-3)

ELEV 437

TDZE 430

MIRL Rwy 10-28 0