



WAAS CH 57944 W13A	APP CRS 135°	Rwy Ldg 4825 TDZE 84 Apt Elev 84
--	------------------------	---

RNAV (GPS) RWY 13

SALINAS MUNI (SNS)

RNP APCH - GPS.	MISSED APPROACH: (Do not exceed 185K until MARN A). Climb to 600, then climbing right turn to 3000 direct MARN A and hold, continue climb-in-hold to 3000.
Rwy 13 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. Circling NA for Cat C northeast of Rwy 13 and north of Rwy 26. Circling NA for Cat D northeast of Rwy 13-31.	

ATIS 124.85	NORCAL APP CON 133.0 251.15	SALINAS TOWER ★ 119.525 (CTAF) 239.3	GND CON 121.7	UNICOM 123.0
-----------------------	---------------------------------------	--	-------------------------	------------------------

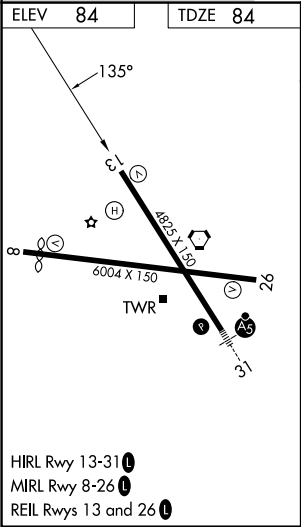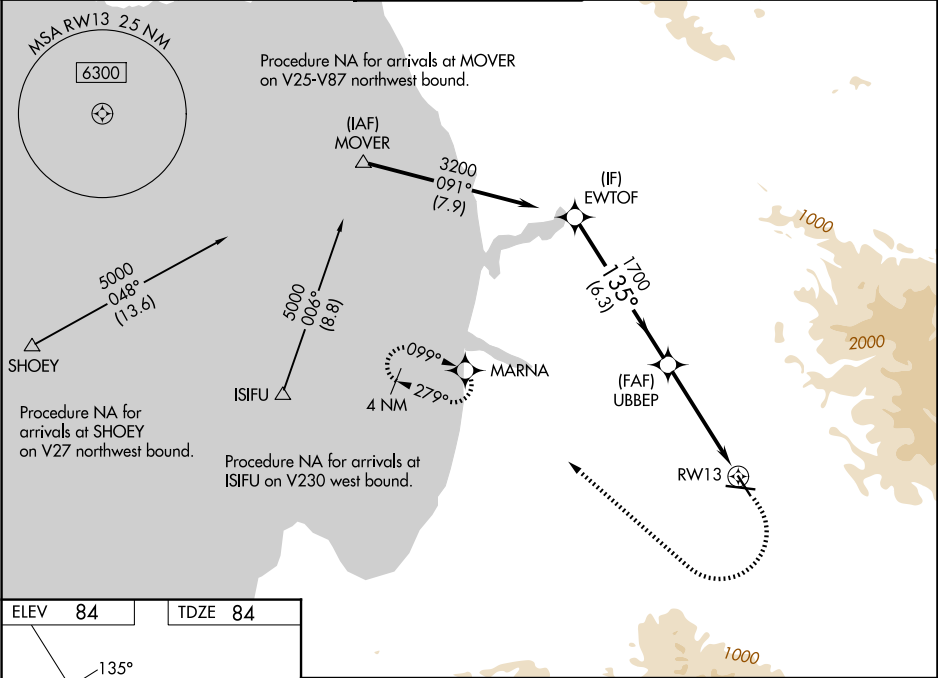

EWTOF		600		3000		MARN A	
3200		1700		1.4 NM to RW13		RW13	
GP 3.12°							
TCH 50							
6.3 NM		3.3 NM		1.4 NM			
CATEGORY	A	B	C	D			
LPV DA	334-¾ 250 (300-¾)						
LNAV/VNAV DA	447-1	363 (400-1)	463-1	379 (400-1)	488-1⅛	404 (500-1⅛)	
LNAV MDA	580-1	496 (500-1)	580-1⅜	496 (500-1⅜)			
CIRCLING	580-1	496 (500-1)	800-2	716 (800-2)	1620-3	1536 (1600-3)	