


WAAS CH 87101 W18A	APP CRS 176°	Rwy Ldg TDZE 199 Apt Elev 203
--	------------------------	---

RNAV (GPS) RWY 18

VALDOSTA RGNL (VLD)

RNP APCH - GPS.	▼ ▲ Rwy 18 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C.	MISSED APPROACH: Climb to 2700 direct VCATS and hold.
-----------------	--	---

ASOS 126.225	VALDOSTA APP CON ★ 126.6 285.6	VALDOSTA TOWER ★ 128.35 (CTAF) 0	GND CON 121.7	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

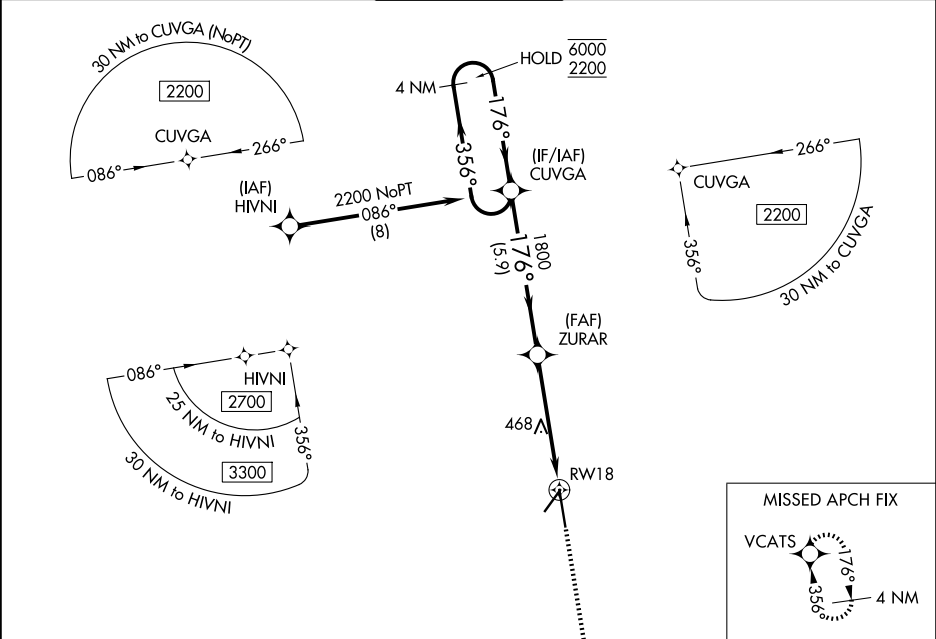

ELEV 203		D	TDZE 199
VCATS		176°	
4 NM Holding Pattern		VCATS	
6000		81	
2200		176°	
GP 3.00°		5598 X 100	
TCH 50		8003 X 150	
5.9 NM		36	
3.4 NM		45	
1.5 NM		36	
CATEGORY	A	B	C
LPV DA	454-¾	255 (300-¾)	
LNAV/VNAV DA	458-¾	259 (300-¾)	
LNAV MDA	720-1	521 (600-1)	720-1½ 521 (600-1½)
CIRCLING	720-1	517 (600-1)	900-2 697 (700-2) 1020-2¾ 817 (900-2¾)

SE-4, 25 DEC 2025 to 22 JAN 2026

SE-4, 25 DEC 2025 to 22 JAN 2026