

WAAS CH 82416 W05A	APP CRS 046°	Rwy Ldg TDZE Apt Elev	5320 16 17
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 5

SOUTHWEST OREGON RGNL (OTH)

RNP APCH.

▼


▲

Circling Rwy 13, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. For inop ALS, increase LPV all Cats visibility to ½ SM, LNAV/VNAV all Cats visibility to 1½ SM, and increase LNAV Cat C/D visibility to 1½ SM.

MAISR

MISSED APPROACH: Climb to 6000 direct RUNUE and on track 015° to RARES and hold, continue climb-in-hold to 6000.

AWOS-3PT 135.075	SEATTLE CENTER 127.55 254.35	NORTH BEND TOWER* 118.45 (CTAF) 0	GND CON 127.1
----------------------------	--	---	-------------------------

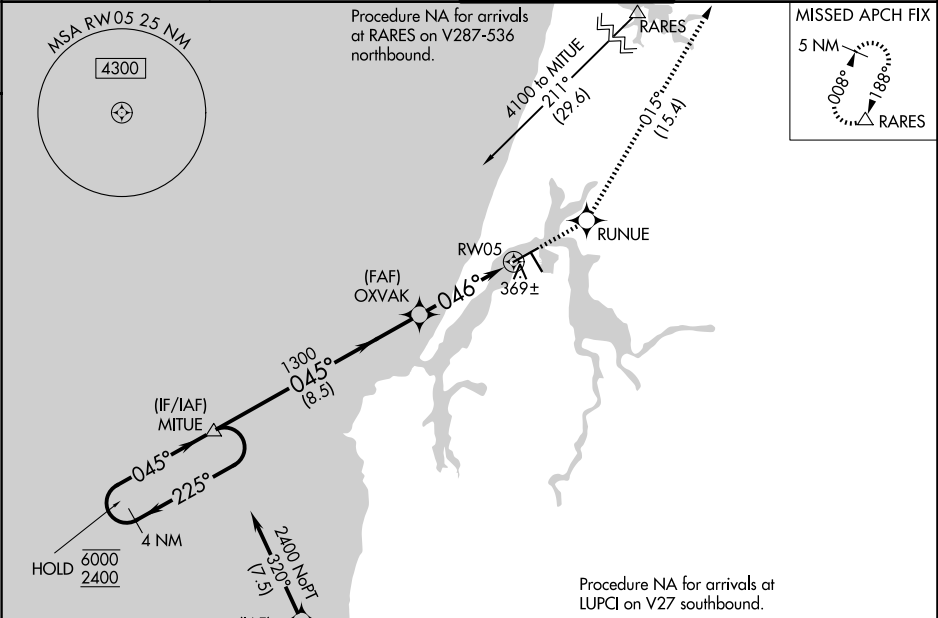

ELEV 17

TDZE 16

4 NM Holding Pattern	MITUE	OXVAK	6000	RUNUE	RARES
6000 ← 225°	← 045°	1300	↑	tr 015°	△
GP 3.00° TCH 51	045°	1300	*1.7 NM to RW05	*LNAV only	
	8.5 NM	2.2 NM	1.7 NM		
CATEGORY	A	B	C	D	
LPV DA		319-1½	303 (400-½)		
LNAV/VNAV DA		550-1¾	534 (600-1¾)		
LNAV MDA	620-½	604 (700-½)	620-1¾	604 (700-1¾)	
CIRCLING	680-1 663 (700-1)	820-1 803 (900-1)	1100-3 1083 (1100-3)	1160-3 1143 (1200-3)	

5980 X 150

4420 X 150

TWR

046°

31

HIRL Rwy 5-23

MIRL Rwy 13-31

REIL Rwys 13, 23 and 31

NW-1, 25 DEC 2025 to 22 JAN 2026

NW-1, 25 DEC 2025 to 22 JAN 2026