


WAAS CH 99617 W32A	APP CRS 326°	Rwy Ldg TDZE Apt Elev	6301 1322 1333
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 32


WICHITA DWIGHT D EISENHOWER NTL (ICT)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.	MISSED APPROACH: Climb to 3600 direct CEPGA and hold.
--	---

ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6
-----------------------	---------------------------------------	-------------------------------------	-------------------------------

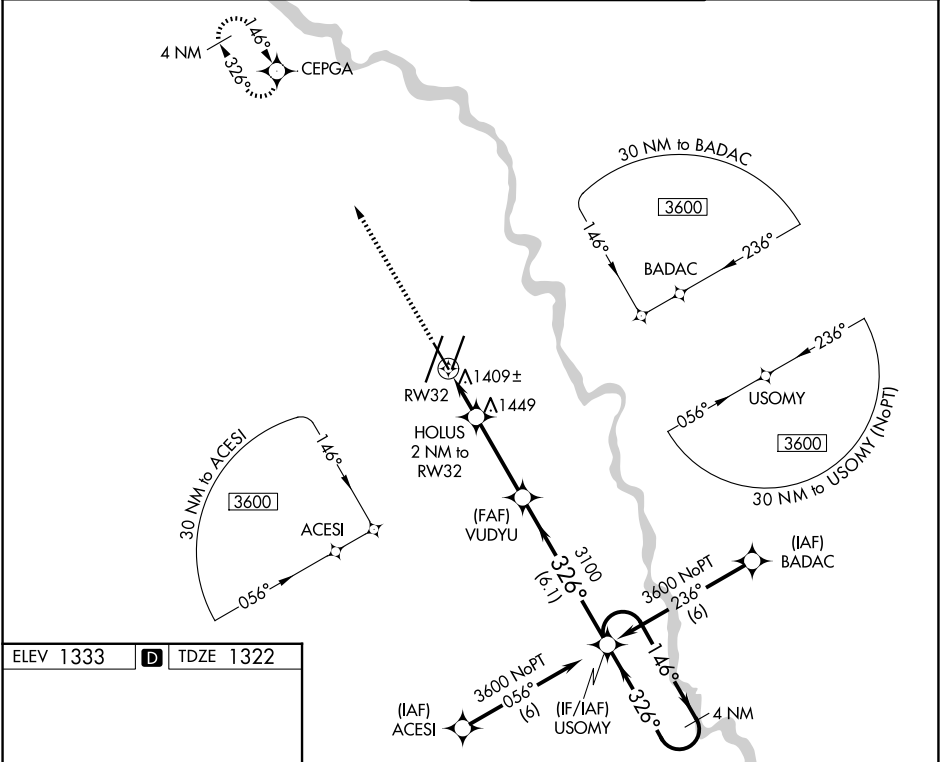

ELEV 1333	D	TDZE 1322
-----------	----------	-----------

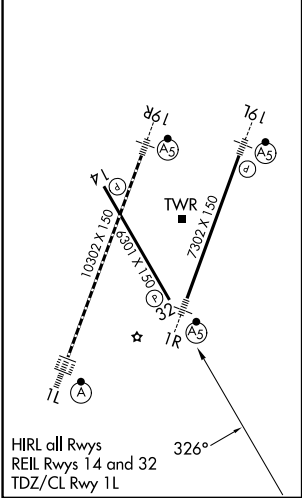

3600 ↑	CEPGA ✦	USOMY				4 NM Holding Pattern	
*LNAV only.		HOLUS 2 NM to RW32	VUDYU 3100	3100		146° 3600	
1 NM to RW32		2000		326°		GP 3.00° TCH 53	
RW32		326°		3100			
1 NM		1 NM		3.3 NM		6.1 NM	
CATEGORY	A		B		C		D
LPV DA			1572-3/4		250 (300-3/4)		
LNAV/ VNAV DA			1761-1½		439 (500-1½)		
LNAV MDA			1680-1 358 (400-1)				1680-1¼ 358 (400-1¼)
CIRCLING	1800-1 467 (500-1)		1980-1¾ 647 (700-1¾)		1980-2 647 (700-2)		