


WAAS CH 58004 W21A	APP CRS 210°	Rwy Ldg TDZE 697 Apt Elev 697
--	------------------------	---

RNAV (GPS) RWY 21
VERMILION RGNL (DNV)

RNP APCH - GPS.	MALSRL	MISSED APPROACH: Climb to 2300 direct ATULE and hold.
Circling NA to Rwy 12 and 30. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LPV all Cats visibility to 1 SM and LNAV Cat D visibility to 1 1/4 SM.		

AWOS-3 119.275	CHAMPAIGN APP CON ★ 121.35 285.65	CLNC DEL 121.7	UNICOM 122.7 (CTAF)
--------------------------	---	--------------------------	-------------------------------

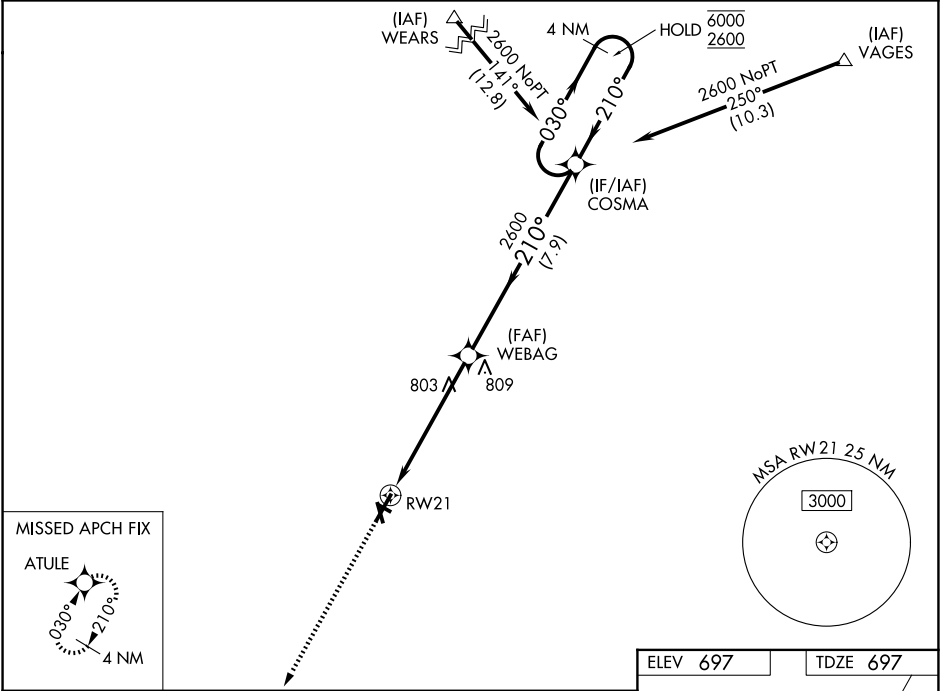

2300		ATULE	
RWY 21		4 NM Holding Pattern	
1.1 NM to RWY 21		COSMA 2600	
210°		030° → 6000	
2600		← 210° 2600	
GP 3.00°		TCH 46°	
1.1		4.7 NM	
7.9 NM			
CATEGORY	A	B	C
LPV DA	990-1/2	293 (300-1/2)	
LNAV/VNAV DA	1069-3/4	372 (400-3/4)	
LNAV MDA	1080-1/2	383 (400-1/2)	1080-1
			383 (400-1)
CIRCLING	1160-1	463 (500-1)	1240-1/2
			543 (600-1/2)

