

LAFAYETTE, TENNESSEE

AL-6653 (FAA)

23222

WAAS CH 61316 W19A	APP CRS 188°	Rwy Idg 5000 TDZE 961 Apt Elev 969
--	------------------------	---

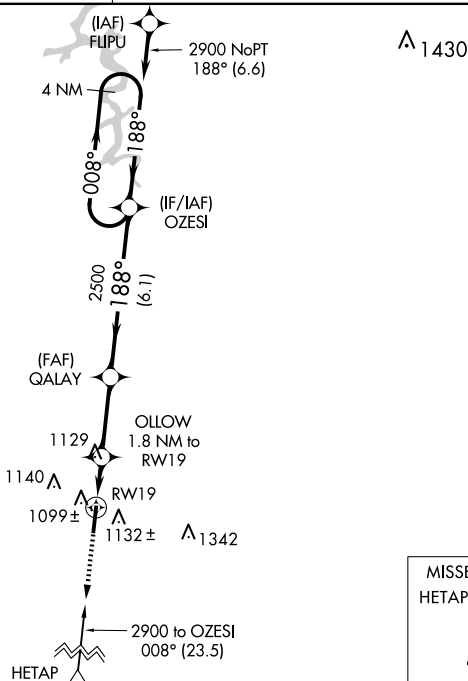

RNAV (GPS) RWY 19
LAFAYETTE MUNI (3M7)

RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 46°C .
A Obtain local altimeter setting on CTAF; when not received, use Bowling Green altimeter setting:
 increase LPV DA to 1344 feet and all visibilities $\frac{1}{2}$ SM; increase LNAV/VNAV DA to 1502 feet
 and all visibilities $\frac{1}{2}$ SM; increase all MDAs 140 feet and visibility LNAV CAT C $\frac{1}{4}$ SM, CAT D $\frac{1}{2}$ SM,
 and Circling CAT C and D $\frac{1}{2}$ SM. Rwy 19 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climb to 3000 direct
HETAP and hold.

NASHVILLE APP CON
118.4 360.7

UNICOM
122.8 (CTAF) **L**

ELEV 969

TDZE 961

188°

61

5200 X 75

0.5% Up

☆

P

1

MIRL Rwy 1-19

REIL Rwy 1 and 19

3000 HETAP

VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 40).

4 NM Holding Pattern

OZESI

008° → 2900

← 188°

GALAY

188°

2500

*1560

RW19

1.8 NM

2.9 NM

6.1 NM

GP 3.00° TCH 45

CATEGORY	A	B	C	D
LPV DA	1211-1	250 (300-1)		
RNAV/ VNAV DA	1369-1½	408 (400-½)		
RNAV MDA	1380-1 419 (500-1)	1380-1¼ 419 (500-1¼)		
CIRCLING	1440-1 471 (500-1)	1600-1¾ 631 (700-1¾)	1700-2¼ 731 (800-2¼)	

LAFAYETTE, TENNESSEE
Amdt 1A 08SEP22

36°31'N - 86°03'W

LAFAYETTE MUNI (3M7)
RNAV (GPS) RWY 19

SE-1, 25 DEC 2025 to 22 JAN 2026