

WAAS CH 93715 W36A	APP CRS 001°	Rwy Idg 5002 TDZE 835 Apt Elev 845
--	------------------------	---

RNAV (GPS) RWY 36

NORTH CENTRAL MISSOURI RGNL (MO8)

RNP APCH.


▼

▲ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using Kirksville altimeter setting. When local altimeter setting not received, use Kirksville altimeter setting and increase all LPV and LNAV/VNAV DA to 1169 feet and increase all visibility ½ mile; increase all MDA 100 feet, increase LNAV Cat C/D visibility ¼ mile, and Circling Cat C visibility ½ mile. Rwy 36 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3000 direct
COROS and hold.

AWOS-2 118.425	KANSAS CITY CENTER 125.25 235.975	CTAF 122.9 0
--------------------------	---	------------------------

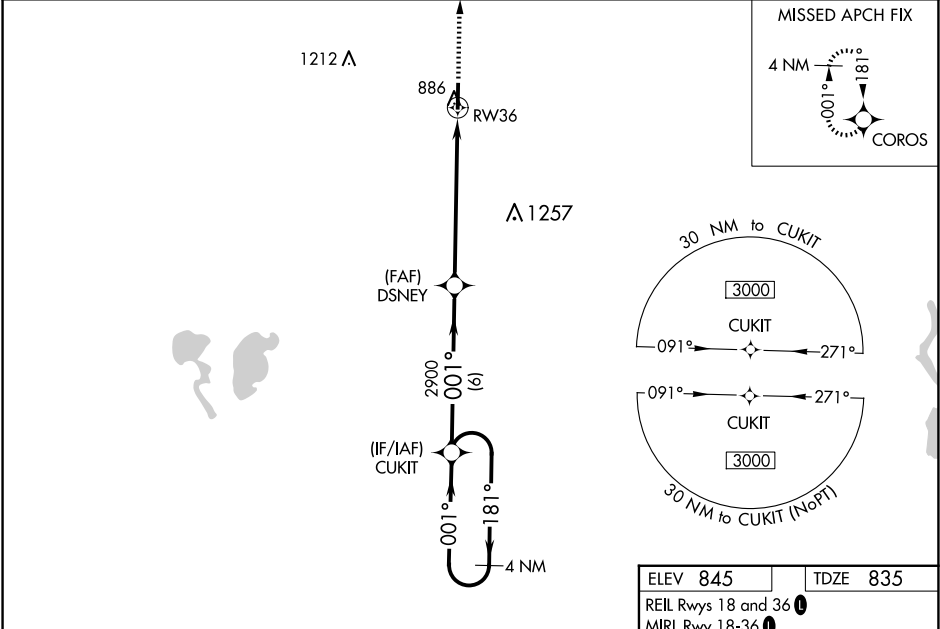

4 NM Holding Pattern

CUKIT

3000

181°

001°

GP 3.00° TCH 40

DSNEY

2900

001°

2900

6 NM

5 NM

1.4 NM

3000


COROS

*1.4 NM to RW36

*LNAV only

RW36

CATEGORY	A	B	C	D
LPV DA	1085-1 250 (300-1)			
LNAV/ VNAV DA	1085-1 250 (300-1)			
LNAV MDA	1300-1 465 (500-1)	1300-1 ¾ 465 (500-1 ¾)		
CIRCLING	1300-1 455 (500-1)	1300-1 ½ 455 (500-1 ½)	1400-2 555 (600-2)	

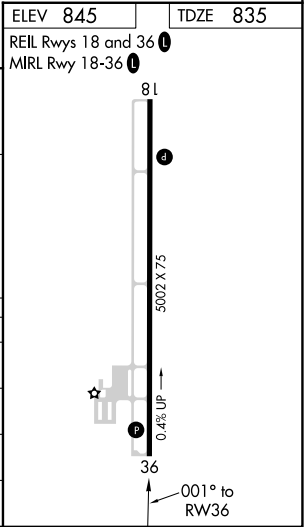

NC-3, 25 DEC 2025 to 22 JAN 2026

NC-3, 25 DEC 2025 to 22 JAN 2026