


LOC/DME I-BIL	APP CRS	Rwy Ldg	10518
111.5	102°	TDZE	3585
Chan 52		Apt Elev	3662

ILS Y or LOC Y RWY 10L

BILLINGS LOGAN INTL (BIL)

DME required. RNP APCH-GPS. From BEARE or LRSUN.	MALSR	MISSED APPROACH: Climb to 4500 then climbing right turn to 6000 on BIL VORTAC R-122 to BIL VORTAC and hold.
For inop ALS, increase S-LOC 10L Cat C/D visibility to RVR 6000. # RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 126.3	BILLINGS APP CON 120.5 284.6	BILLINGS TOWER 127.2 257.8	GND CON 121.9
---------------	---------------------------------	-------------------------------	------------------

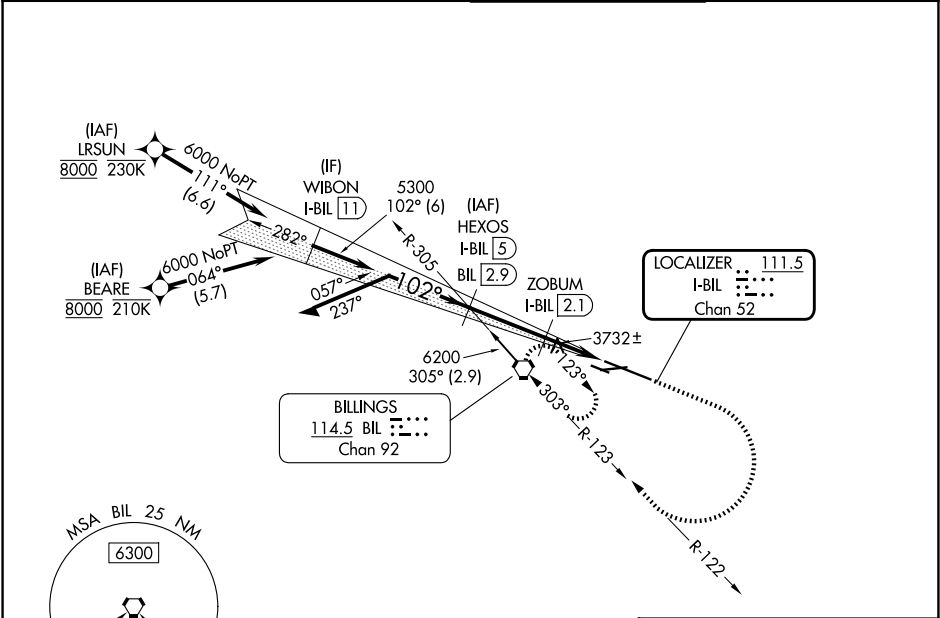

ELEV 3662		TDZE 3585	
Rwy 10R-28L: 3800 X 75		Rwy 7-25: 5501 X 75	
TWR		REIL Rwy 25 and 28R	
		HIRL Rwy 10L-28R	
		MIRL Rwy 7-25 and 10R-28L	
		FAF to MAP 5.2 NM	
Knots		60 90 120 150 180	
Min:Sec		5:12 3:28 2:36 2:05 1:44	

CATEGORY	A	B	C	D
S-ILS 10L #	3785/24 200 (200-½)			
S-LOC 10L	4000/24	415 (400-½)	4000/40	415 (400-¾)
CIRCLING	4160-1	498 (500-1)	4180-1½ 518 (600-½)	4580-3 918 (1000-3)