

ILS RWY 5L (CAT II & III)
INDIANAPOLIS INTL (IND)

ALSF-2

MISSED APPROACH: Climb to 1700 then climbing left turn to 3000 direct VHP VORTAC then on VHP VORTAC R-303 to KEADY/VHP 4.9 DME/RADAR and hold.

MISSED APCH FIX

KEDDY VHP 4.9 RADAR

OINKK INT I-IND 6.1 RADAR

STDUM I-IND 9 RADAR

(IF) FTBLL I-IND 12.1 RADAR

(IAF) WAAYN I-IND 15.2 RADAR 210K

5000 to WAAYN 004° (0.9) and LOC (10.1)

(IAF) KELLY VHP 27.9

(CFVDC)

R-303 123° 116.3 VHP Chan 110

2000 050° (2.8)

3000 050° (3.1)

4000 050° (3.1)

116.3 VHP R-183 Chan 110

LOCALIZER 111.75 I-IND Chan 54(Y)

IM 870±

RADAR or DME REQUIRED

ALTERNATE MISSED APCH FIX

115.3 TTH R-077 Chan 100

077° 257°


CLOTT TTH 23.3 RADAR

ELEV 796 D TDZE 747

MSA VHP 25 NM 3100


Procedure NA for arrivals at KELLY on V11 southwest bound and V12 westbound.

1700	3000	VHP 	VHP R-303	KEADY VHP 4.9 RADAR
------	------	--	--------------	---------------------------

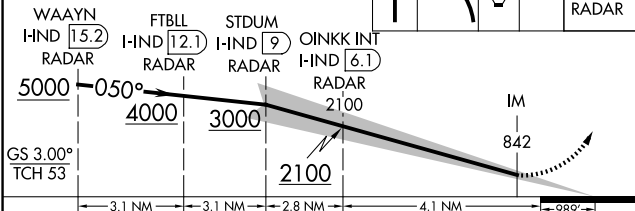

CATEGORY	A	B	C	D
S-ILS 5L		CAT II RA 113/12	100 DA 847	
S-ILS 5L		CAT III	RVR 07	

CATEGORY II & III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED



HIRL all Rwy's
TDZ/CL Rwy's 5L and 5R

EC-2, 22 JAN 2026 to 19 FEB 2026

EC-2, 22 JAN 2026 to 19 FEB 2026