

WAAS Ch 45902 W10A	APP CRS 100°	Rwy Ldg TDZE 6600 Apt Elev 606
--	------------------------	--



RNAV (GPS) RWY 10
PURDUE UNIVERSITY (LAF')

When local altimeter setting not received, use Vermilion Rgnl altimeter setting and increase LPV DA to 966 feet and visibility all Cats 1/8 SM; increase LNAV/VNAV DA to 1172 feet; increase all MDAs 100 feet and LNAV Cats C/D visibility 1/4 SM, increase Circling Cat C visibility 1/2 SM and Cat D visibility 1/4 SM. Baro-VNAV NA when using Vermilion Rgnl altimeter setting. VDP NA when using Vermilion Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). For inoperative MALSR, increase LPV all Cats visibility to 1 mile. DME/DME RNP-0.3 NA. Circling Rwy 23 NA at night.

MALSR

MISSED APPROACH:
Climb to 2600 direct
OGREY and hold.

ATIS 127.75	GRISCOM APP CON* 123.85 291.675	LAFAYETTE TOWER* 119.6 (CTAF) 343.625	GND CON 121.9 343.625	UNICOM 122.95
-----------------------	---	---	---------------------------------	-------------------------

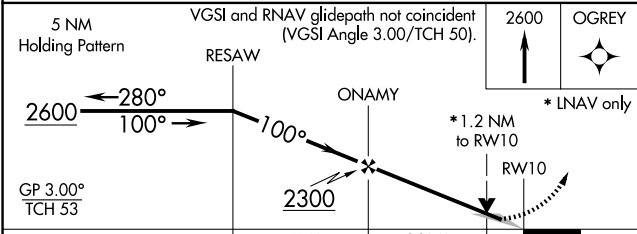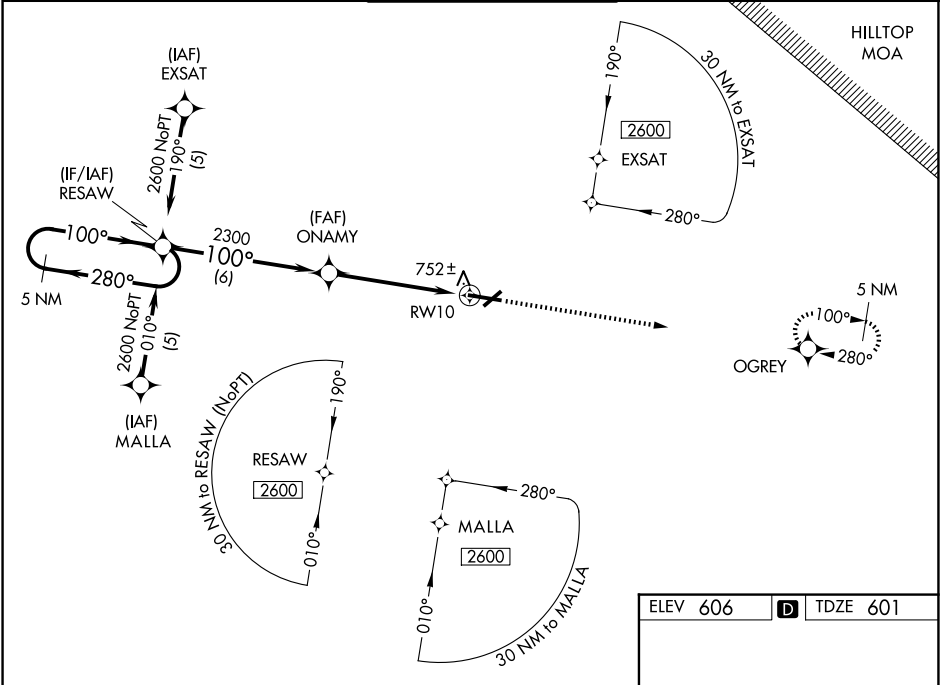

ELEV 606 D TDZE 601

HIRL Rwy 10-28
REIL Rwy 5, 23 and 28
MIRL Rwy 5-23