RNAV (GPS) RWY 10R
CAPITAL REGION INTL (LAN)

WAAS CH 61314 W10A	APP CRS 096°	Rwy Ldg 8506 TDZE 861 Apt Elev 861

RNP APCH - GPS.

Circling Rwy 10L, 28R NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 10R helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase LPV all Cats visibility to RVR 4500, LNAV/VNAV all Cats visibility to RVR 6000, LNAV Cats A/B to RVR 5500 and Cats C/D to RVR 6000.

MALSR

MISSED APPROACH: Climb to 3000 direct DUTVE and hold.

ATIS	GREAT LAKES APP CON ★	LANSING TOWER	GND CON
119.75	118.65 226.4	119.9 240.9	121.9

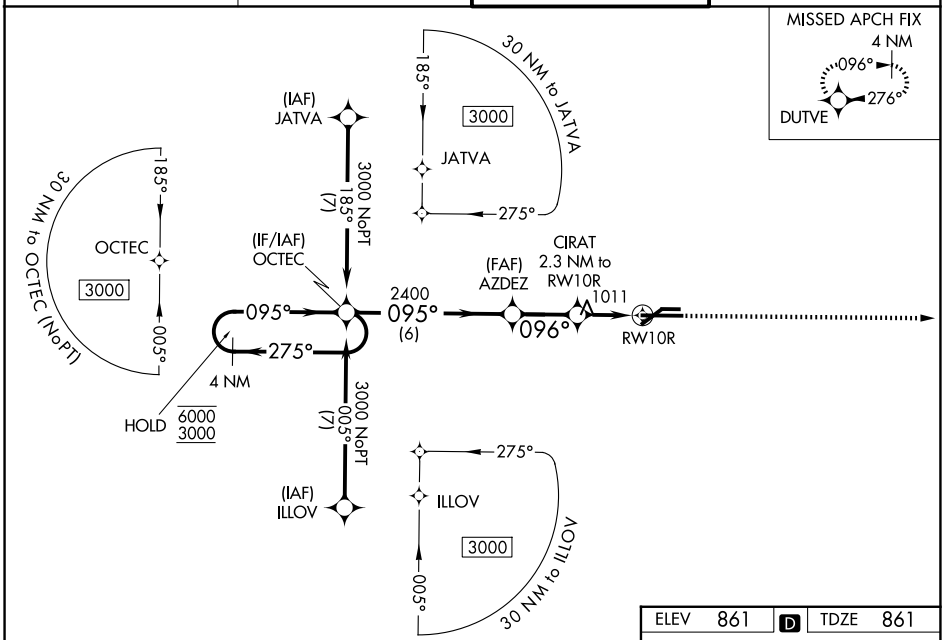

ELEV 861	D	TDZE 861

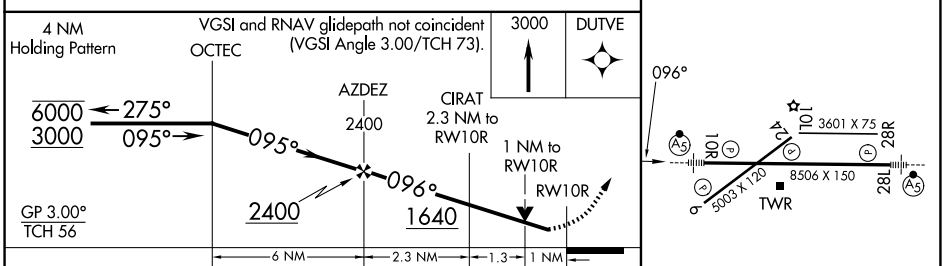

CATEGORY	A	B	C	D
LPV DA	1153/40		292 (300-¾)	
LNAV/VNAV DA	1245/40		384 (400-¾)	
LNAV MDA	1280/40		419 (500-¾)	
CIRCLING	1320-1 459 (500-1)	1340-1 479 (500-1)	1600-2 739 (800-2)	1760-3 899 (900-3)

MIRL Rwy 6-24
HIRL Rwy 10R-28L
REIL Rwys 6 and 24

EC-1, 22 JAN 2026 to 19 FEB 2026

EC-1, 22 JAN 2026 to 19 FEB 2026