

APP CRS
256°

Rwy Ldg
TDZE
48

Apt Elev
60

RNAV (RNP) RWY 26R

LONG BEACH (DAUGHERTY FLD) (LGB)


RNP AR APCH - GPS, RF. Authorization required.

▼

For uncompensated Baro-VNAV systems, procedure NA below 4°C or above 54°C.

MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct PADDR and hold, continue climb-in-hold to 3000.

ATIS 127.75	SOCAL APP CON 125.35 316.125	LONG BEACH TOWER ★ 120.5 257.6 (12) 119.4 (CTAF) 0 257.6 (30)	GND CON 133.0 257.6	UNICOM 122.95
-----------------------	--	---	-------------------------------	-------------------------

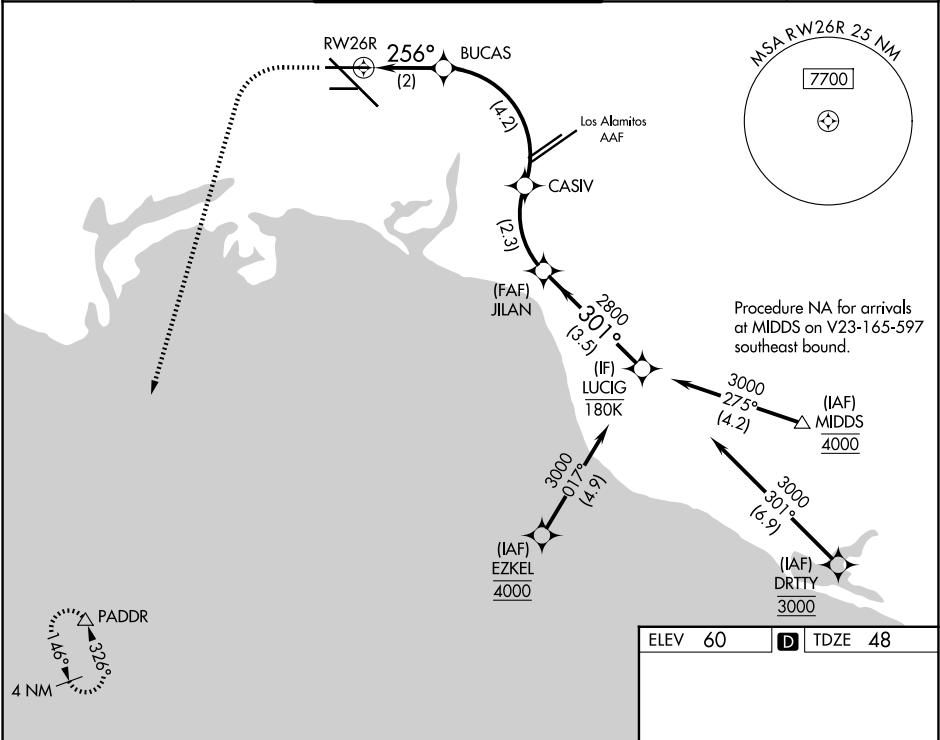

800

3000

PADDR

VGSI and RNAV glidepath not coincident (VGSI Angle 3.10/TCH 62).

BUCAS

CASIV

JILAN

LUCIG

RWY 26R

256°

731

2066

2800

301°

3000

GP 3.00°

TCH 55

2 NM

4.2 NM

2.3 NM

3.5 NM

CATEGORY	A	B	C	D
RNP 0.15 DA		324-7/8	276 (300-7/8)	
RNP 0.30 DA		415-1	367 (400-1)	

AUTHORIZATION REQUIRED

TDZ/CL Rwy 30

HIRL Rwy 12-30

HIRL Rwy 8R-26L

MIRL Rwy 8L-26R

REIL Rwy 8R, 12, 26L, and 26R