

LOC/DME I-JJM <u>110.55</u> Chan 42 (Y)	APP CRS 350°	Rwy Ldg 7800 TDZE 479 Apt Elev 501
---	------------------------	---

ILS or LOC RWY 35R
LOUISVILLE MUHAMMAD ALI INTL (SDF)


DME or RADAR required for LOC only.

ALSF-2

MISSED APPROACH: Climb to 2500 then climbing left turn to 4000 on heading 350° and on IIIU VORTAC R-332 to HEALS/28.3 DME/RADAR and hold.

T Simultaneous approach authorized. Circling Rwy 11 NA at night.
A For inop ALS, increase LOC Cat C/D to 5000 RVR.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6
-------------------	-------------------------------------	---------------------------------	------------------------

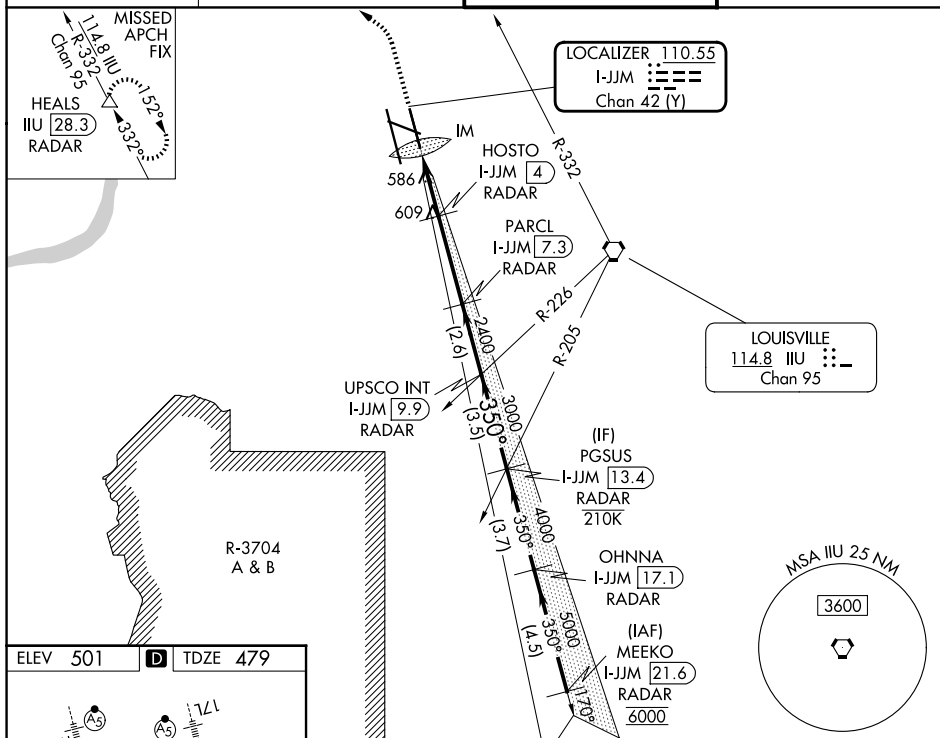

FAF to MAP	5.9 NM
Knots	60 90 120 150 180
Min:Sec	5:54 3:56 2:57 2:22 1:58

CATEGORY	A	B	C	D
S-ILS 35R	679/18 200 (200-½)			
S-LOC 35R	840/24	361 (400-½)	840/35	361 (400-¾)
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)