

FOLZZ THREE DEPARTURE(RNAV)

MIAMI-OPA LOCKA EXEC (OPF)
MIAMI, FLORIDA

MIAMI DEP CON
126.85 290.325
ATIS
125.9
CLNC DEL
119.2
GND CON
120.025
OPA LOCKA TOWER★
134.675 (CTAF)

**TOP ALTITUDE:
ASSIGNED BY ATC**

RNAV-1 DME/DME/IRU or GPS.
SNAGY and SUMRS Transitions: RNAV 1-GPS.

RADAR required.

NOTE: Jet aircraft only.

NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.

NOTE: PADUS Transition for Freeport arrivals only.

NOTE: SNAGY and SUMRS Transitions for European traffic only.


TAKEOFF MINIMUMS

Rwy 9L: Standard with minimum climb of 500'/NM to 1000.

Rwy 9R: Standard with minimum climb of 500'/NM to 700.

Rwy 12, 27R: Standard with minimum climb 500'/NM to 600.

Rwy 27L, 30: Standard.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 9L/R: Climb on heading 093° or as assigned by ATC for RADAR vectors to cross MARCK at or above 5000, thence. . .

TAKEOFF RUNWAY 12: Climb on heading 128° or as assigned by ATC for RADAR vectors to cross MARCK at or above 5000, thence. . .

TAKEOFF RUNWAYS 27L/R: Climb on heading 273° or as assigned by ATC for RADAR vectors to cross MARCK at or above 5000, thence. . .

TAKEOFF RUNWAY 30: Climb on heading 308° or as assigned by ATC for RADAR vectors to cross MARCK at or above 5000, thence. . .

. . . on track 060° to FOLZZ, then on assigned transition. Maintain ATC assigned altitude, expect filed altitude within 10 minutes after departure.

ALYRA TRANSITION (FOLZZ3.ALYRA)

FREREPORT TRANSITION (FOLZZ3.ZFP)


GOZZR TRANSITION (FOLZZ3.GOZZR)

PADUS TRANSITION (FOLZZ3.PADUS)

SNAGY TRANSITION (FOLZZ3.SNAGY)

SUMRS TRANSITION (FOLZZ3.SUMRS)

FOLZZ THREE DEPARTURE(RNAV)
(FOLZZ3.FOLZZ) 21MAR24

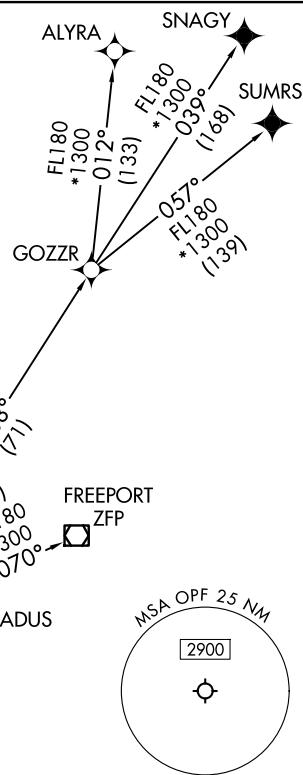

NOTE: Chart not to scale.