

WAAS CH 82712 W11A	APP CRS 112°	Rwy Ldg 4808 TDZE 1487 Apt Elev 1497
--	------------------------	---

RNAV (GPS) RWY 11

EASTERN OREGON RGNL AT PENDLETON (PDT)

RNP APCH.


▼

⚠

Baro-VNAV and VDP NA when using Walla Walla altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Walla Walla altimeter setting and increase all DA/MDA 120 feet; VNAV all Cats visibility 1⁄8 SM, LNAV Cat C visibility 3⁄8 SM, and Cat D visibility 1⁄8 SM, Circling Cat C visibility 1⁄4 SM and Circling Cat D visibility 1⁄2 SM.

MISSED APPROACH:
Climb to 5000 direct
ADXAB and on track
007° to ZUTED and hold.

ASOS 118.325	SPOKANE APP CON ★ 133.15 379.15	PENDLETON TOWER ★ 119.7 (CTAF) 257.8	GND CON 121.9 257.8	UNICOM 122.95
------------------------	---	--	-------------------------------	-------------------------

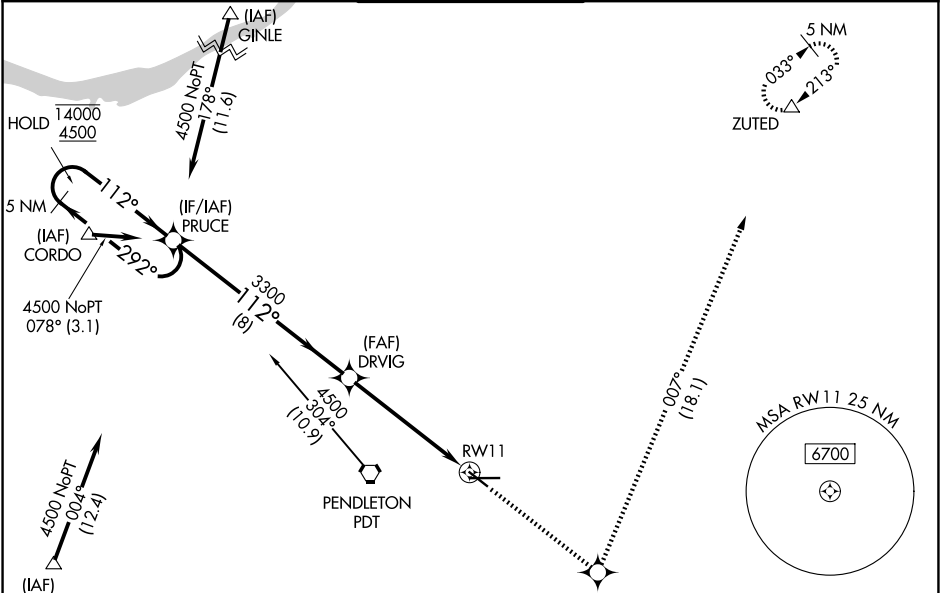

ECHOD				ADXAB		ELEV 1497		D		TDZE 1487	
5 NM Holding Pattern				5000 ↑		ADXAB ✱		tr 007° ↷		ZUTED △	
PRUCE				DRVIG		*1 NM to RW11		*LNAV only			
14000 ← 292° 4500 → 112°				3300		RW11					
GP 3.00° TCH 43				8 NM		4.5 NM		1 NM			
CATEGORY		A		B		C		D			
LPV DA		1737-1 250 (300-1)									
LNAV/ VNAV DA		1850-1¼ 363 (400-1¼)									
LNAV MDA		1860-1 373 (400-1)						1860-1¼ 373 (400-1¼)			
CIRCLING		1920-1 423 (500-1)		1960-1 463 (500-1)		1980-1½ 483 (500-1½)		2200-2¼ 703 (800-2¼)			
REIL Rws 11 and 29 ① MIRL Rwy 11-29 ① HIRL Rwy 8-26 ①											