

WAAS	APP CRS	Rwy Idg	7441
CH 99712	183°	TDZE	534
W19A		Apt Elev	534

RNAV (GPS) RWY 19

PRESQUE ISLE INTL (PQI)

RNP APCH - GPS

▼


▲

❄

Rwy 19 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling Rwy 10 NA at night. When local altimeter setting not received, use HUL altimeter setting: increase LPV DA to 1019 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1205 feet and all visibilities ½ SM; increase all MDAs 100 feet and LNAV visibility Cats B, C, and D ½ SM, and Circling visibility Cats B and C ½ SM and Cat D ½ SM. Baro-VNAV and VDP NA when using HUL altimeter setting.

MISSED APPROACH: Climb to 3400 direct CORAC and hold.

AWOS-3PT 118.025	BOSTON CENTER 124.75 239.05	CLNC DEL 121.6	UNICOM 122.8 (CTAF)	122.6
---------------------	--------------------------------	-------------------	------------------------	-------

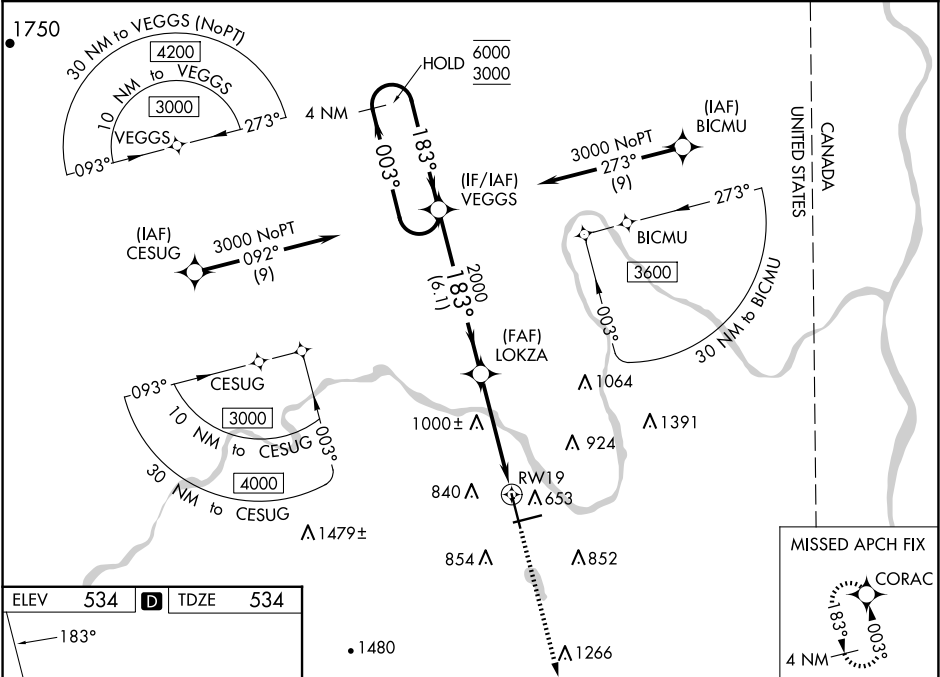

ELEV 534	D	TDZE 534
----------	---	----------

183°

61

7441 X 150

1.1 % UP

10

6000 X 100

28

654

AS

3400

CORAC

VGSI and RNAV glidepath not coincident (VGSI Angle 3.70/TCH 50).

4 NM

Holding Pattern

LOKZA

2000

183°

003°

6000

3000

GP 3.00°

TCH 55

1.7 NM to RWY 19

2.7 NM

6.1 NM

1.7 NM

2.7 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA	929-1⅛		395 (400-1⅛)	
LNAV/VNAV DA	1115-1¾		581 (600-1¾)	
LNAV MDA	1240-1	706 (800-1)	1240-2	706 (800-2)
CIRCLING	1240-1	706 (800-1)	1320-2¼ 786 (800-2¼)	1380-2¾ 846 (900-2¾)

REIL Rwy 19

HIRL Rwy 1-19

MIRL Rwy 10-28

CIRCLING