

WAAS

CH 45606

W23A

APP CRS

238°

Rwy Ldg

8002

TDZE

3967

Apt Elev

3967

SCOTTSBLUFF/WESTERN NEBRASKA RGNL/WM B HEILIG FLD (BFF)


RNAV (GPS) RWY 23

⚠


When local altimeter setting not received, use Alliance altimeter setting: increase LPV DA to 4347 feet and visibility ¼ SM; increase LNAV/VNAV DA to 4679 feet; increase all MDAs 100 feet and visibility Cats C and D ½ SM. Baro-VNAV NA when using Alliance altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 41°C (105°F). VDP NA when using Alliance altimeter setting. Visibility reduction by helicopters NA. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 6700 direct GESBE and via 243° track to PUREE and hold.

ASOS 121.025	DENVER CENTER 127.95 338.2	UNICOM 123.0 (CTAF) 1
-----------------	-------------------------------	--------------------------

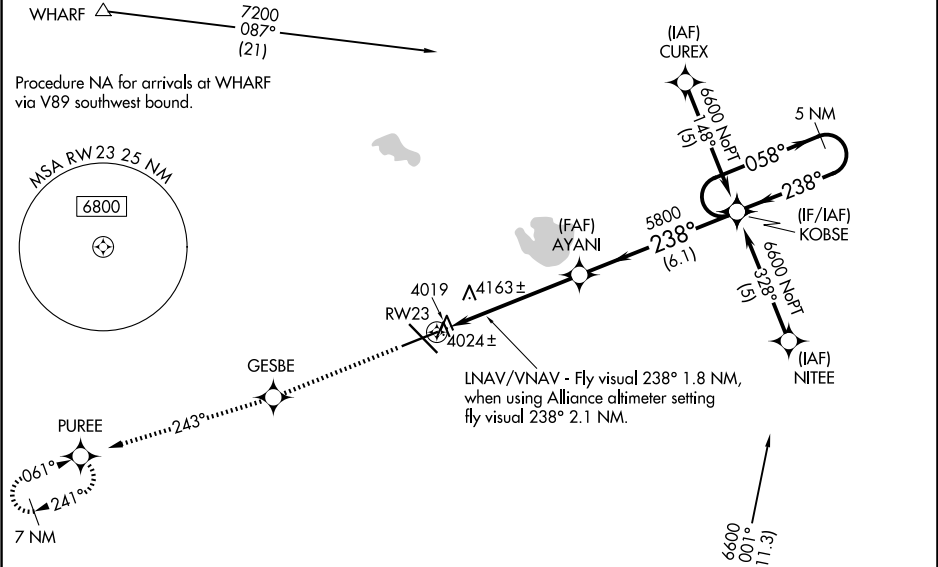

ELEV 3967	D	TDZE 3967
-----------	---	-----------

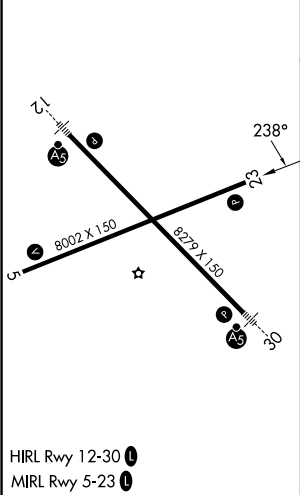

6700	GESBE	243° tr	PUREE	LNAV/VNAV - Fly visual 238° 1.8 NM, when using Alliance altimeter setting fly visual 238° 2.1 NM.	5 NM Holding Pattern
*LNAV only					
*1.3 NM to RW23					
RW23					
AYANI					
KOBSE					
5800					
GP 3.00° TCH 52					
1.3 NM 4.2 NM 6.1 NM					
CATEGORY	A	B	C	D	
LPV DA	4256-1 289 (300-1)				
LNAV/VNAV DA	4588-2 621 (700-2)				
LNAV MDA	4420-1	453 (500-1)	4420-1¼ 453 (500-1½)	4420-1½ 453 (500-1½)	
CIRCLING	4500-1	533 (600-1)	4560-1½ 593 (600-1½)	4740-2½ 773 (800-2½)	