


WAAS CH 65931 W04A	APP CRS 038°	Rwy Ldg 4499 TDZE 1949 Apt Elev 1957
--	------------------------	---


RNAV (GPS) RWY 4L
FELTS FLD (SFF)

RNP APCH - GPS.  Circling to Rwy 22L NA at night. Circling NA northwest of Rwy 4L-22R. Rwy 4L helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.  -15°C	MISSED APPROACH: Climb to 2850 then climbing right turn to 8000 direct CEVOS and on track 059° to KARPS and hold, continue climb-in-hold to 8000. *LPV missed approach requires minimum climb of 330 feet per NM to 5400.
---	---

ATIS 120.55	SPOKANE APP CON 133.35 263.0	FELTS TOWER ★ 132.5 (CTAF) 0 239.025	GND CON 121.7	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

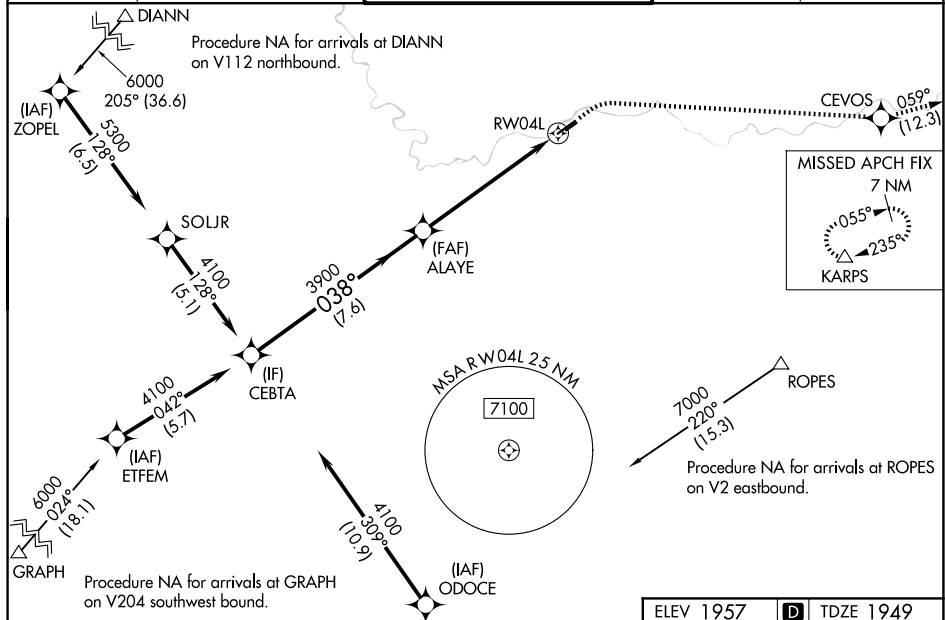

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50). CEBTA 4100 GP 3.00° TCH 56		ALAYE 3900 038° 3900		2850 8000 CEVOS tr 059° KARPS	
7.6 NM		3.4 NM		2.6 NM to RW04L RW04L	
CATEGORY	A	B	C	D	
LPV DA*	2203-3/4		254 (300-3/4)		
LPV DA	2529-1 5/8		580 (600-1 5/8)		
LNNAV/ VNAV	DA	2779-2 1/2		830 (900-2 1/2)	
LNNAV MDA	2820-1 871 (900-1)	2820-1 1/4 871 (900-1 1/4)	2820-2 1/2		871 (900-2 1/2)
CIRCLING	2820-1 1/4 1143 (1200-3)	863 (900-1 1/4)	3100-3 1143 (1200-3)		3360-3 1403 (1500-3)

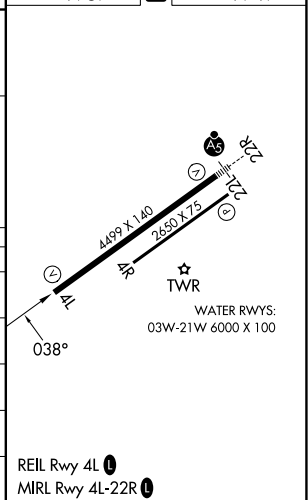

NW-1, 22 JAN 2026 to 19 FEB 2026