

WICHITA, KANSAS

RNAV (GPS) Y RWY 1L

WAAS CH 71272 W01A	APCH CRS 008°	Rwy Idg 12,000 TDZE 1347 Arpt Elev 1372
--------------------------	------------------	---

(USAF)

MC CONNELL AFB (KIAB)

RNP APCH-GPS

- T** * When ALS inop, increase RVR to 40, vis to 3/4 mile.
 ** When ALS inop, increase RVR to 60, vis to 1 1/8 miles.
 *** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile;
 CAT CDE RVR to 60, vis to 1 1/8 miles.

ALSF-1



MISSED APPROACH: Climb to 2000 then climbing to 4000, direct PURKE and hold. Expect further clearance from ATC.



D-ATIS 124.65 269.9	WICHITA APP CON 134.8 269.1	TOWER 127.25 291.775	GND CON 118.0 275.8
------------------------	--------------------------------	-------------------------	------------------------

**** Circling not authorized
west of Rwy 1L-19R.


For uncompensated Baro-VNAV systems, procedure not authorized below -17°C (2°F) or above 49°C (121°F).

When circling to Rwy 19L at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

RADAR required for holding
aby 5000 or aby 230 KIAS

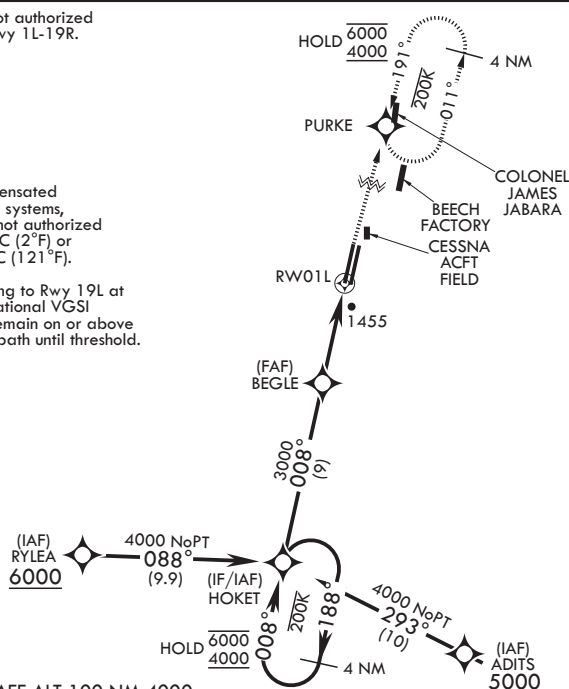

EMERG SAFE ALT 100 NM 4000

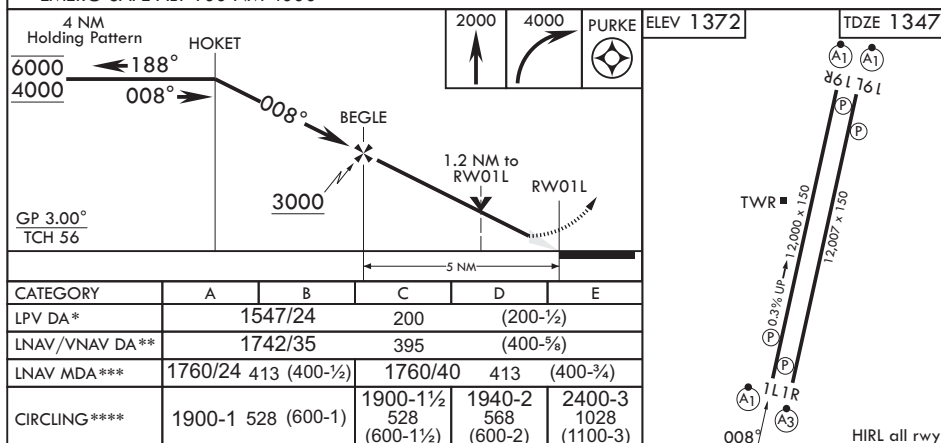

WICHITA, KANSAS

37°37'N - 97°16'W

MC CONNELL AFB (KJAB)

Amdt 6 12JUN25

RNAV (GPS) Y RWY 1L