
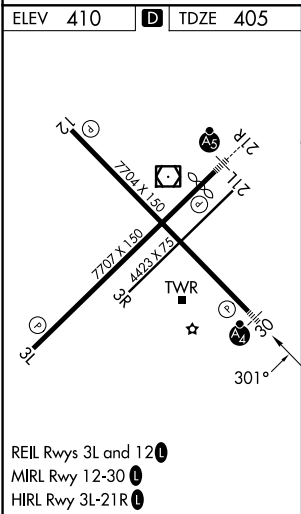


APP CRS	Rwy Ldg	7704
301°	TDZE	405
	Apt Elev	410

RNAV (RNP) Z RWY 30
TRI-CITIES (PSC)

RNP AR APCH - GPS, RF. Authorization required. From JUDIV, XELOW, HIYGE, KADDE, OLODE: min RNP 0.50.	MAISF	MISSED APPROACH: Climb to 5200 on 301° track to WEDAV, left turn to YOCUY, and track 254° to PAIDS and hold, continue climb-in-hold to 5200.
For uncompensated Baro-VNAV systems, procedure NA below -14°C or above 54°C. For inop ALS, increase RNP 0.30 visibility all Cats to 1 3⁄8 SM.		

ATIS 125.65	SPOKANE APP CON * 128.75 377.2	TRI-CITIES TOWER * 135.3 (CTAF) 285.55	GND CON 121.8	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

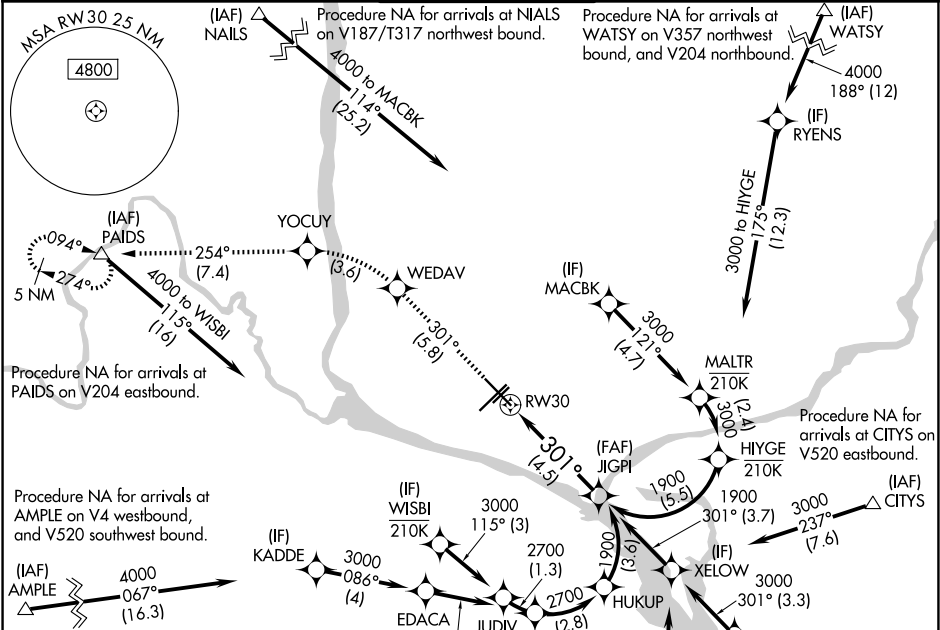

2700 to IZCED 086° (4)		IZCED 210K		3000 348° (18)		(IAF) IHAYO	
Procedure NA for arrivals at OLODE on V298 southeast bound.						(IAF) OLODE	
5200 301° tr	WEDAV 		YOCUY 	tr 254° △	PAIDS △	JIGPI 1900	
See planview for multiple IF locations.						1900	
						GP 3.00° TCH 54	
CATEGORY	A		B		C		D
RNP 0.11 DA	778-3/4 373 (400-3/4)						
RNP 0.30 DA	852-1 447 (500-1)						
AUTHORIZATION REQUIRED							