

LOC/DME I-ALI 109.3 Chan 30	APP CRS 308°	Rwy Idg 5997 TDZE 174 Apt Elev 178
---	------------------------	---

LOC/DME RWY 31
ALICE INTL (ALI)

RADAR required for procedure entry from Corpus Christi CRP VORTAC.


A VDP NA when using Nueces County altimeter setting. When local altimeter setting not received, use Nueces County altimeter setting and increase all MDAs 60 feet and S-LOC 31 visibility Cat C/D $\frac{1}{4}$ SM, and Circling visibility Cat D $\frac{1}{4}$ SM. For inop ALS when using Nueces County altimeter setting, increase S-31 Cats C, D visibility to $1\frac{1}{2}$ SM.

MALS


 $A_4 + \begin{array}{c} \equiv \\ \equiv \\ \equiv \\ \equiv \\ \equiv \end{array}$

MISSED APPROACH: Climb to 1500 then climbing left turn to 2000 on direct ALI VOR and hold.

ASOS 119.225	KINGSVILLE APP CON ★ 119.9 290.45	UNICOM 123.0 (CTAF) 0
------------------------	---	--

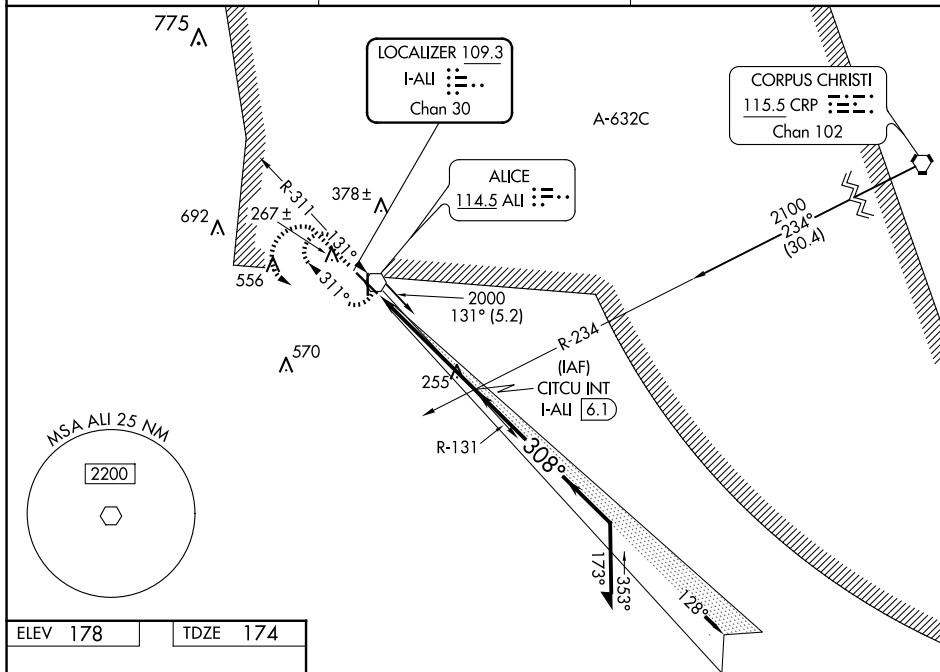

ELEV 178		TDZE 174
----------	--	----------

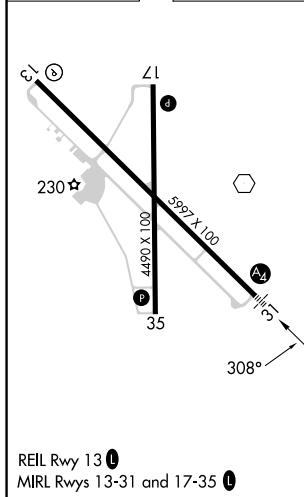

VGS1 and descent angles not coincident.

CITCU INT
I-ALI 6.1

2000

128°

Remain within 10 NM

2000

308°

1800

I-ALI 2.1

I-ALI 1.2

3.04°

TCH 47

1 NM

3.9 NM

CATEGORY	A	B	C	D
S-31		520- $\frac{3}{4}$	346 (400- $\frac{3}{4}$)	
CIRCLING	600-1 422 (500-1)	640-1 462 (500-1)	700-1 $\frac{1}{2}$ 522 (600-1 $\frac{1}{2}$)	900-2 $\frac{1}{4}$ 722 (800-2 $\frac{1}{4}$)

ALICE, TEXAS
Orig-F 05OCT23

27°44'N-98°02'W

ALICE INTL (ALI)

LOC/DME RWY 31