


APP CRS	Rwy Ldg	6300
190°	TDZE	6451
	Apt Elev	6451

RNAV (RNP) X RWY 19

JACKSON HOLE (JAC)

RNP AR APCH-GPS.	MALS	MISSED APPROACH: Climb to 14000 on track 190° to HIPUL and on track 193° to KICNE and hold, continue climb-in-hold to 14000. *Missed approach requires minimum climb of 226 feet per NM to 11600. #Missed approach requires minimum climb of 215 feet per NM to 11600.
▼ For uncompensated Baro-VNAV systems, procedure NA below -27°C or above 54°C. For inop ALS, increase RNP 0.20# all Cats visibility to RVR 6000. For inop ALS, increase RNP 0.30 all Cats visibility to 1 1/4 SM.	24	

D-ATIS	SALT LAKE CENTER	JACKSON TOWER★	GND CON	UNICOM
120.625	133.25 285.6	118.075 (CTAF) 0	124.55	122.95

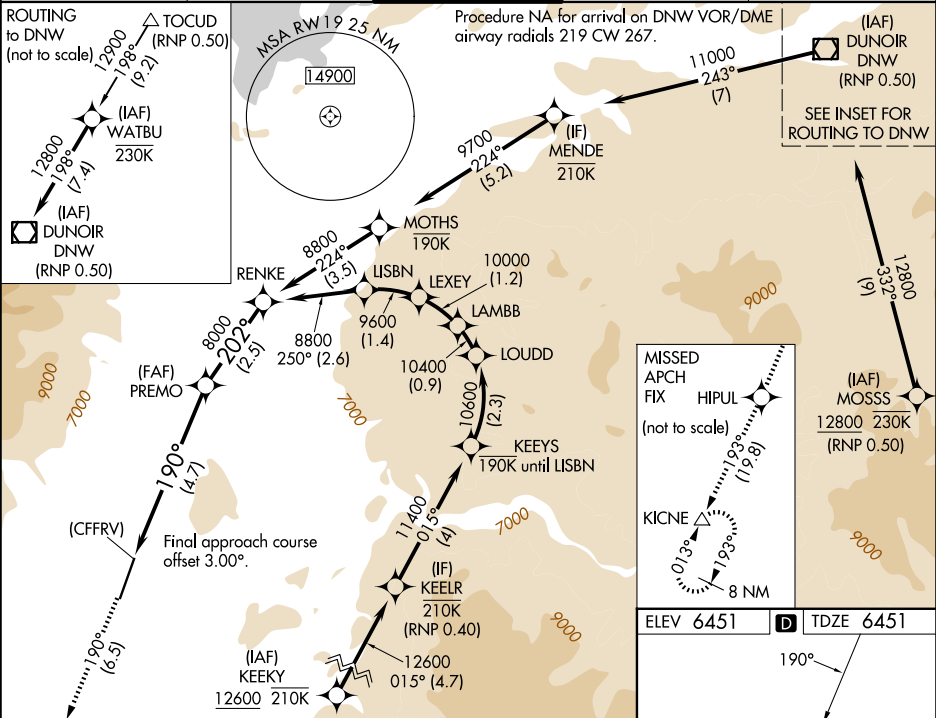

14000	HIPUL	tr 190°	KICNE	PREMO	RENKE
tr 190°		tr 193°	△	8000	8800
See planview for multiple IF locations.					
(CFFRV)					
GP 3.00° TCH 53					
CATEGORY	A	B	C	D	
RNP 0.10 DA*	6777/40 326 (400-3/4)				
RNP 0.20 DA#	6856/50 405 (500-1)				
RNP 0.30 DA#	6938/60 487 (500-1 1/4)				
RNP 0.30 DA	7045-1 3/8 594 (600-1 3/8)				

AUTHORIZATION REQUIRED

NW-1, 22 JAN 2026 to 19 FEB 2026

NW-1, 22 JAN 2026 to 19 FEB 2026