



LOC/DME I-VXO 110.55 Chan 42 (Y)	APP CRS 133°	Rwy Ldg TDZE 344 Apt Elev 344
--	------------------------	---

ILS or LOC RWY 13
READING RGNL/CARL A SPAATZ FLD (RDG)

⚠ Circling Rwy 18, 31 NA at night. Helicopter visibility reduction below ¾ SM NA. VDP NA when using Harrisburg Intl altimeter setting. When local altimeter setting not received, use Harrisburg Intl altimeter setting and increase S-ILS 13 Cat A DA to 637 feet and visibility ½ SM, Cat B DA to 652 feet and visibility ½ SM, Cat C and D DA to 687 feet and visibility ¼ SM, and increase all MDA 100 feet and S-LOC 13 Cat C visibility ¼ SM, Circling Cats B and C visibility ¼ SM.


MISSED APPROACH: Climb to 900 then climbing right turn to 3200 on heading 280° and LRP VOR/DME R-020 to OUTLT INT/I-VXO 12.7 DME and hold.

ATIS 127.1	HARRISBURG APP CON 125.15 257.9	READING TOWER ★ 119.9 (CTAF) 0 288.3	GND CON 121.9	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

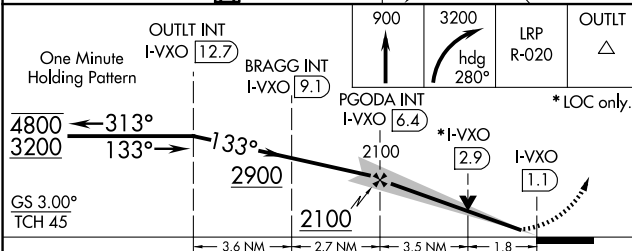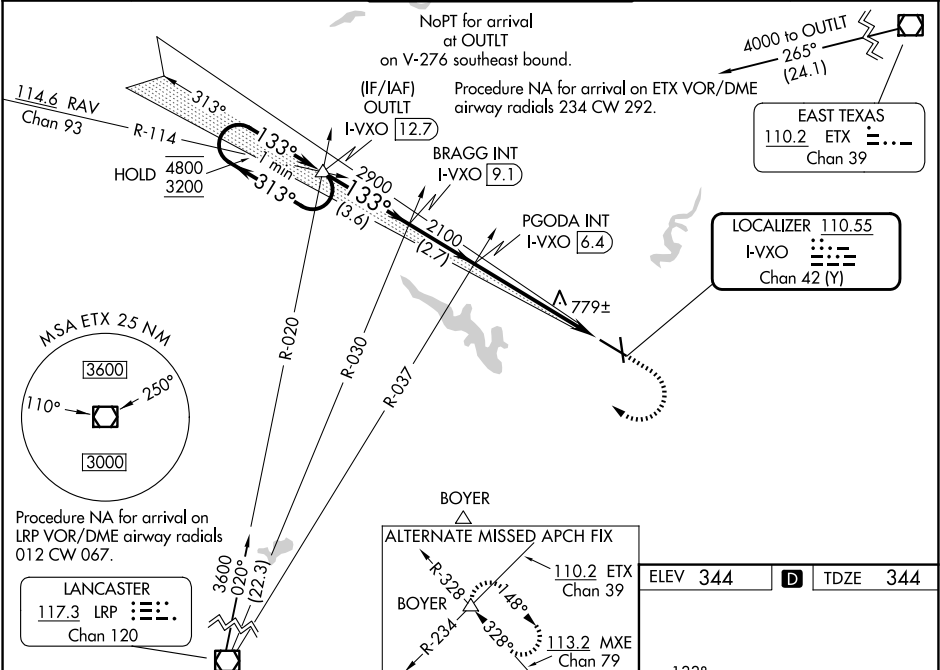

CATEGORY	A	B	C	D
S-ILS 13	544-¾ 200 (200-¾)	559-¾ 215 (300-¾)	594-¾ 250 (300-¾)	
S-LOC 13	980-1	636 (700-1)	980-1¾ 636 (700-1¾)	980-2 636 (700-2)
CIRCLING	1020-1 676 (700-1)	1080-1 736 (800-1)	1280-2¾ 936 (1000-2¾)	1660-3 1316 (1400-3)

ELEV 344	D	TDZE 344
----------	---	----------

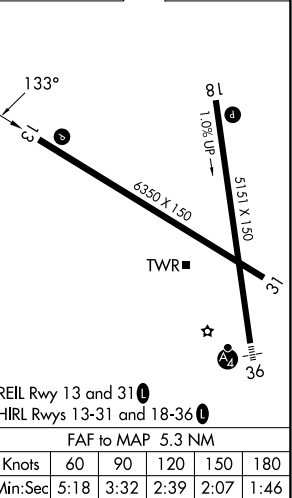

NE-4, 22 JAN 2026 to 19 FEB 2026

NE-4, 22 JAN 2026 to 19 FEB 2026