

WAAS CH 45548	APP CRS 247°	Rwy Ldg TDZE 682 Apt Elev 690
-------------------------	------------------------	---

RNAV (GPS) RWY 25
ALPENA COUNTY RGNL (APN)

RNP APCH - GPS.



▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 25 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV and VDP NA when using PZQ altimeter setting. When local altimeter setting not received, use PZQ altimeter setting and increase LPV DA to 1018 feet; increase LNAV/VNAV DA to 1115 feet and all visibilities 1/4 SM. Increase all MDAs 60 feet and LNAV visibility Cat C/D 1/4 SM.

MISSED APPROACH:
Climb to 3000 direct
GRYDR and hold.

ATIS ★ 120.675 327.05	ALPENA APP CON ★ 128.425 379.3	ALPENA TOWER ★ 121.35 (CTAF) 0 318.1	GND CON 121.9 275.8	UNICOM 122.95
---------------------------------	--	--	-------------------------------	-------------------------

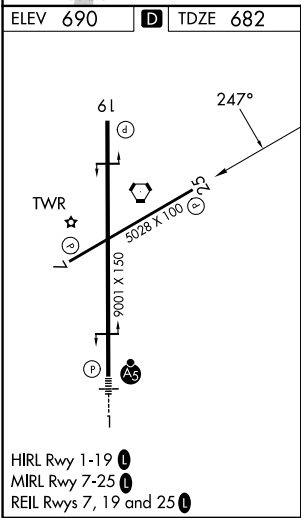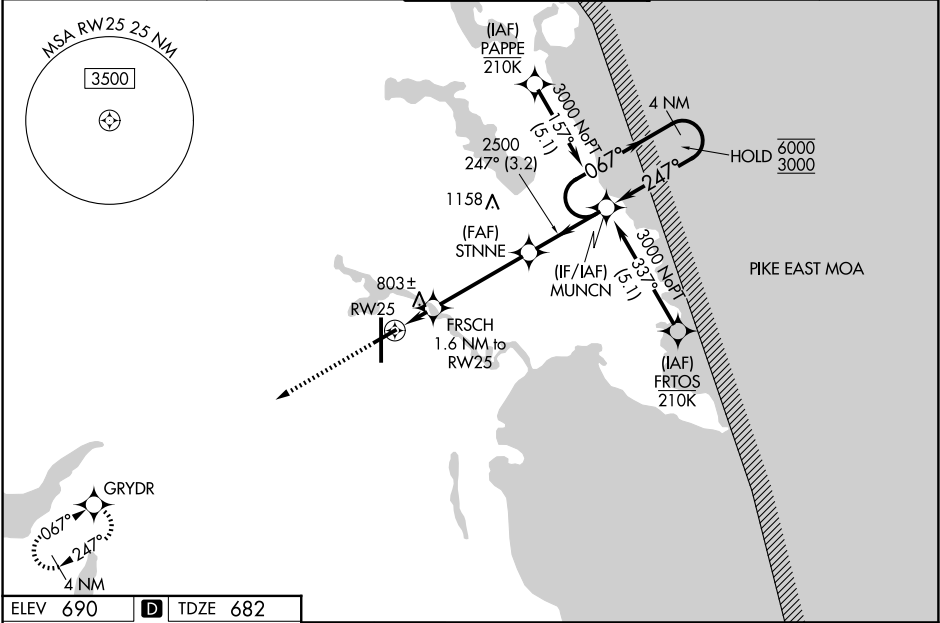

3000	GRYDR	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 48).			
					