

JACKSONVILLE, ARKANSAS

WAAS CH 67565 W25A	APCH CRS 252°	Rwy Idg TDZE Arpt Elev	12,001 301 312
--	-------------------------	------------------------------	---

(USAF)

LITTLE ROCK AFB (KLRF)

RNP APCH - GPS
RADAR required
▼ * When ALS inop, increase RVR to 40, vis to 3/4 mile. When TDZL/CL inop, increase RVR to 24. ** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CD vis to 1 3/8 miles.



ALSF-2


MISSED APPROACH: Climb to 900 then climbing right turn to 3000 direct HERCK and hold.


ATIS★ 119.175 251.1	APP CON/DEP CON 119.5 306.2	TOWER 120.6 269.075	GND CON 132.8 275.8
-------------------------------	---------------------------------------	-------------------------------	-------------------------------

*** Circling not authorized S of Rwy 7-25.
Circling not authorized to assault strip.



ALTERNATE MISSED APPROACH: Climbing to 3000, fly runway heading until 2 DME then right turn heading 360°, expect RADAR vectors from ATC.




ATC RADAR required for holding above 4000' or greater than 230 KIAS.




EMERG SAFE ALT 100 NM 4000

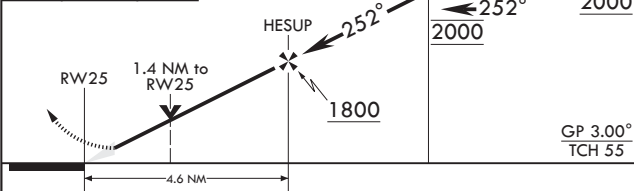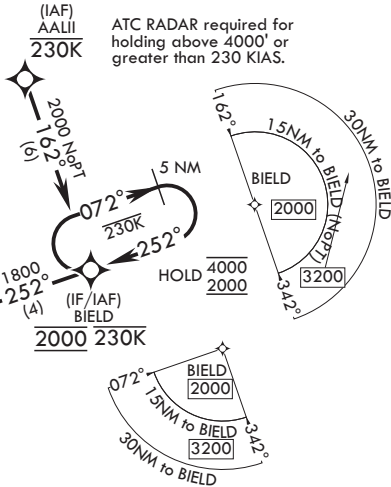

ELEV 312	TDZE 301
----------	----------



CATEGORY	A	B	C	D
LPV DA*	501/18	200	(200-1/2)	
LNAV MDA**	780/24 479 (500-1/2)	780/50 479 (500-1)		
CIRCLING***	780-1 468 (500-1)	880-1 568 (600-1)	880-1 1/2 568 (600-1 1/2)	1040-2 1/4 728 (800-2 1/4)



JACKSONVILLE, ARKANSAS

34°55'N - 92°09'W

LITTLE ROCK AFB (KLRF)

Amdt 1 27NOV25

RNAV (GPS) RWY 25