

WAAS CH 73003 W08A	APP CRS 083°	Rwy Ldg 5646 TDZE 545 Apt Elev 545
--	------------------------	---

RNAV (GPS) RWY 8
LACONIA MUNI (LCI)

RNP APCH - GPS.	
-----------------	--


T When local altimeter setting not received, use Concord altimeter setting and increase LPV DA to 1059 feet and all visibilities $\frac{1}{2}$ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D $\frac{1}{2}$ SM. VDP NA when using Concord altimeter setting. Circling NA south of Rwy 8-26. Circling Rwy 26 NA at night. For inop ALS, increase LPV visibility to $\frac{1}{4}$ SM and LNAV visibility Cat A to 1 SM Cats C and D visibility to $2\frac{1}{2}$ SM.

MALSR




MISSED APPROACH:
Climb to 3000 direct
KOSHI and hold.

AWOS-3PT 133.525	BOSTON APP CON 134.75 254.25	CLNC DEL 119.85	UNICOM 123.0 (CTAF) L
----------------------------	--	---------------------------	---------------------------------

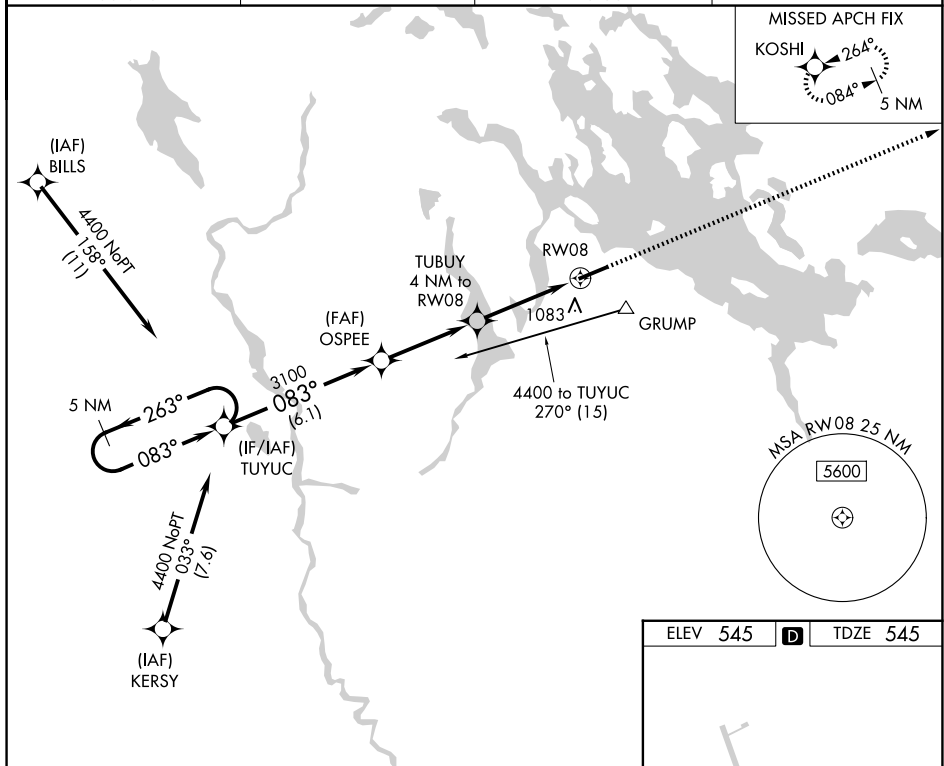

ELEV 545		TDZE 545
----------	---	----------

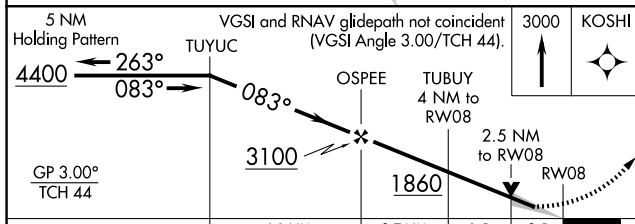

CATEGORY		A		B		C		D	
LPV	DA	978-3 $\frac{3}{4}$ 433 (500-3 $\frac{3}{4}$)							
LNAV	MDA	1380-3 $\frac{3}{4}$	835 (900-3 $\frac{3}{4}$)	1380-1 $\frac{7}{8}$		835 (900-1 $\frac{7}{8}$)			
CIRCLING		1420-1 875 (900-1)	1600-1 $\frac{1}{2}$ 1055 (1100-1 $\frac{1}{2}$)	2160-3 1615 (1700-3)		2860-3 2315 (2400-3)			

