

WAAS CH 72828 W02A	APP CRS 018°	Rwy Idg TDZE 1151 Apt Elev 1165
--	------------------------	---


RNAV (GPS) RWY 2

ATLANTIC MUNI (AIO)


⚠ DME/DME RNP -0.3 NA. Baro-VNAV and VDP NA when using Harlan altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Harlan altimeter setting: increase LPV DA to 1450 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1563 feet and all visibilities ½ SM; increase all MDAs 60 feet, and LNAV visibility Cat C ½ SM and Circling visibility Cat B/C ¼ SM. Circling Rwy 12, 30 NA at night.

MISSED APPROACH:
Climb to 4000 direct
VAKUC and hold.

AWOS-3 127.825	MINNEAPOLIS CENTER 119.6 290.4	UNICOM 122.7 (CTAF)
--------------------------	--	-------------------------------

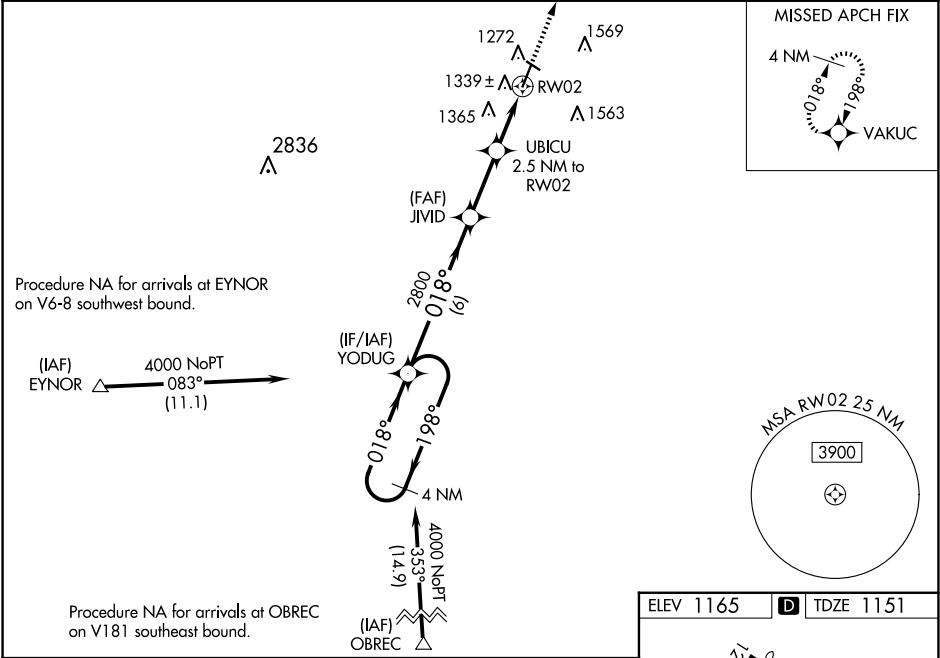

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 31).				
4000 $\xleftarrow{198^\circ}$ $\xrightarrow{018^\circ}$		YODUG		4000 VAKUC
GP 3.00° TCH 39		JIVID		*LNAV only.
2800		UBICU 2.5 NM to RW02		*1.4 NM to RW02
*1980		RW02		
6 NM		2.6 NM		1.1 NM
				1.4 NM
CATEGORY	A	B	C	D
LPV DA	1401-7/8	250 (300-7/8)		NA
LNAV/VNAV DA	1514-1 1/4	363 (400-1 1/4)		NA
LNAV MDA	1620-1	469 (500-1)	1620-1 3/8 469 (500-1 3/8)	NA
CIRCLING	1760-1 595 (600-1)	1920-1 755 (800-1)	1920-2 1/4 755 (800-2 1/4)	NA

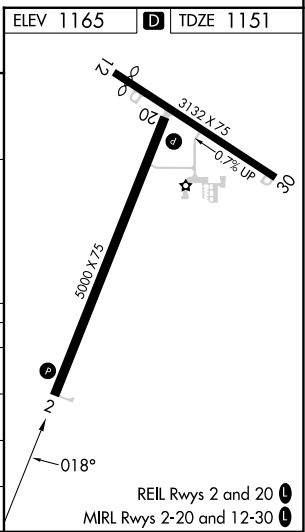

NC-3, 22 JAN 2026 to 19 FEB 2026

NC-3, 22 JAN 2026 to 19 FEB 2026