

WAAS CH 50426 W35A	APP CRS 358°	Rwy Ldg 8900 TDZE 4230 Apt Elev 4230
--	------------------------	---

RNAV (GPS) RWY 35

BRIGHAM CITY RGNL (BMC)


▼

▲ NA

When local altimeter setting not received, use Ogden altimeter setting and increase all MDA 100 feet, increase LP Cat C visibility ¼ mile, increase LNAV Cat B visibility ¼ mile, and Cat C visibility ¾ mile, increase Circling Cat B visibility ¼ mile, and Cat C visibility ½ mile.
DME/DME RNP-0.3 NA. VDP NA with Ogden altimeter setting. Rwy 35 helicopter visibility reduction below ¾ SM NA. Circling NA for Cats B and C, east of Rwy 17-35.

MISSED APPROACH:
Climbing left turn to 7100
direct KONNE and hold.

AWOS-3 135.075	SALT LAKE CITY APP CON 121.1	CLNC DEL 126.0	UNICOM 123.05 (CTAF) 0
--------------------------	--	--------------------------	----------------------------------

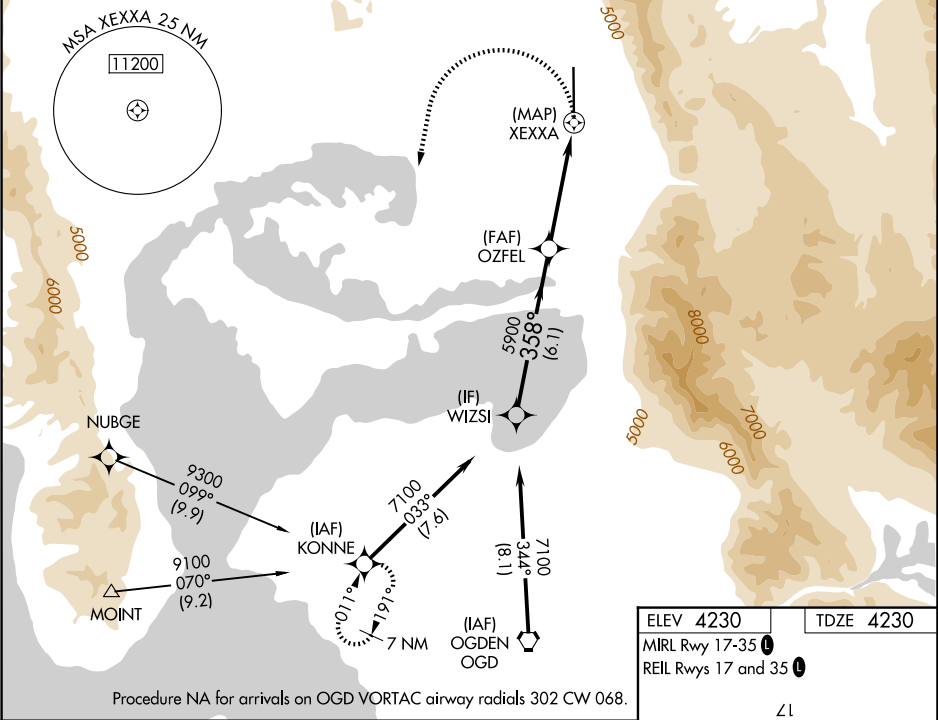

WIZSI		OZFEL		7100 KONNE	
7100		5900		0.7 NM to XEXXA	
358°		3.00°		XEXXA	
6.1 NM		3.9 NM		0.7	
CATEGORY		A		B	
LP MDA		4660-1		430 (500-1)	
LNAV MDA		4900-1		670 (700-1)	
CIRCLING		4900-1		670 (700-1)	
		4660-1¼		430 (500-1¼)	
		4900-1⅞		670 (700-1⅞)	
		5460-2¼		1230 (1300-2¼)	

