

WAAS CH 77531 W03A	APP CRS 033°	Rwy Idg 4748 TDZE 1177 Apt Elev 1182
--	------------------------	---

RNAV (GPS) RWY 3

UNIVERSITY OF OKLAHOMA WESTHEIMER (OUN)


⚠ Baro-VNAV NA when using Will Rogers World altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F).
⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use OKC Will Rogers Intl altimeter setting and increase LPV DA to 1501 feet, LNAV/VNAV DA to 1544 feet; increase all MDA 60 feet, increase LPV visibility to 7/8 mile all Cats, increase LNAV/VNAV visibility to 1 mile all Cats, and increase LNAV Cat C/D visibility to 1 1/8 mile. For inop MALS, increase LPV all Cats visibility to 1 mile, LNAV/VNAV Cat D visibility to 1 1/8 mile, LNAV Cat C/D visibility to 1 1/8 mile. For inop MALS when using OKC Will Rogers Intl altimeter setting, increase LPV all Cats visibility to 1 1/8 mile, LNAV/VNAV Cat D visibility to 1 1/4 mile, LNAV Cat D visibility to 1 3/8 mile. Circling NA southeast of Rwy 3 and 21.

MALS

A1

MISSED APPROACH:
Climb to 1700 then climbing right turn to 3100 direct WETIX and hold.

AWOS-3PT 119.55	OKE CITY APP CON 120.45 288.325	WESTHEIMER TOWER* 118.0 (CTAF) 0	GND CON 121.6	UNICOM 122.95
---------------------------	---	--	-------------------------	-------------------------

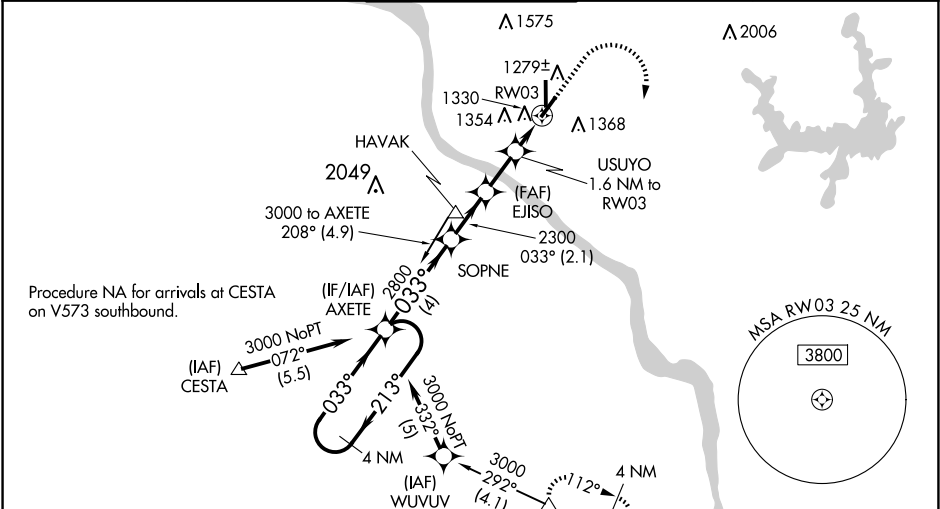

4 NM Holding Pattern

AXETE

SOPNE

EJISO

USUYO 1.6 NM to RWY 03

*LNAV only

GP 3.00° TCH 40

3000 ← 213° 033° → 2800

2300

*1720

4 NM 2.1 NM 1.8 NM 1.6 NM

1700 3100 WETIX

CATEGORY	A	B	C	D
LPV DA	1460-3/4 283 (300-3/4)			
LNAV/VNAV DA	1503-7/8 326 (400-7/8)			
LNAV MDA	1580-3/4 403 (400-3/4)	1580-1 403 (400-1)		
CIRCLING	1660-1 478 (500-1)	1940-2 758 (800-2 1/4)		1940-2 758 (800-2 1/2)

ELEV 1182 TDZE 1177

SC-1, 22 JAN 2026 to 19 FEB 2026

SC-1, 22 JAN 2026 to 19 FEB 2026