

WAAS CH 78228 W07A	APP CRS 071°	Rwy Ldg TDZE 5001 775 Apt Elev 781
--	------------------------	--

RNAV (GPS) RWY 7

ROCHELLE MUNI/KORITZ FLD (RPJ)

RNP APCH - GPS.



▼

⚠

Baro-VNAV NA when using Chicago/Rockford Intl altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C. VDP NA when using Chicago/Rockford Intl altimeter setting. When local altimeter setting not received, use Chicago/Rockford Intl altimeter setting: increase all DA to 1073 feet and all MDA 60 feet; increase LNAV visibility Cats C/D ⅛ mile; increase Circling Cat C visibility ¼ mile.

MISSED APPROACH:
Climb to 2600 direct
BELDE and hold.

AWOS-3 125.2	ROCKFORD APP CON 126.0 327.0	UNICOM 122.975 (CTAF) 0
------------------------	--	-----------------------------------

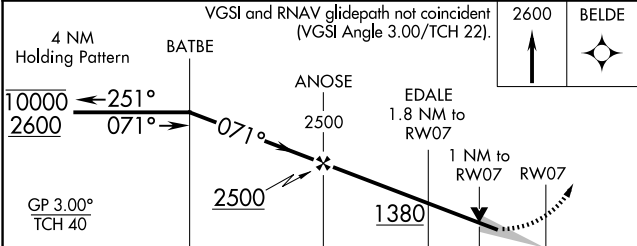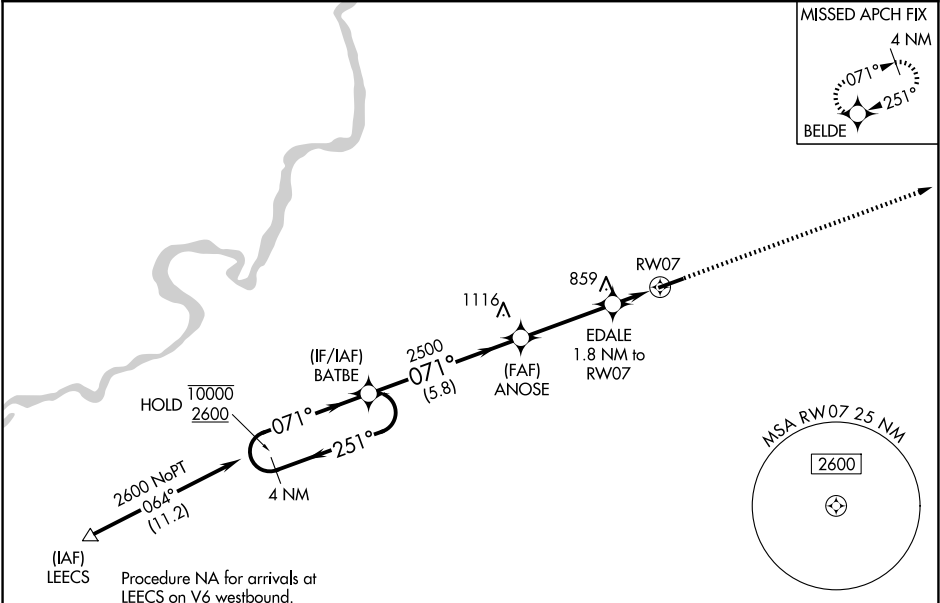

CATEGORY	A	B	C	D
LPV DA		1025-1	250 (300-1)	
LNAV/VNAV DA		1025-1	250 (300-1)	
LNAV MDA		1120-1	345 (400-1)	
CIRCLING	1260-1 479 (500-1)	1360-1 579 (600-1)	1680-2¾ 899 (900-2¾)	1820-3 1039 (1100-3)

ELEV 781 TDZE 775

5001 x 75
071°
2500

MIRL Rwy 7-25
REIL Rws 7 and 25