

WAAS CH 70407 W29A	APP CRS 291°	Rwy Ldg TDZE 127 Apt Elev 145	5480
--	------------------------	---	-------------

RNAV (GPS) RWY 29

SKAGIT RGNL (BVS)

RNP APCH.


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.
Baro-VNAV and VDP NA when using Friday Harbor altimeter setting. When local altimeter setting not received use Friday Harbor altimeter setting; increase LPV DA to 438 feet, LNAV/VNAV DA to 536 feet and all Cats visibility ¼ SM; increase all MDA 60 feet.

MISSED APPROACH: Climb to 4000 direct SOCLO and hold, continue climb-in-hold to 4000.

AWOS-3 121.125	WHIDBEY APP CON 120.7 270.8	UNICOM 123.075 (CTAF) ❶
--------------------------	---------------------------------------	-----------------------------------

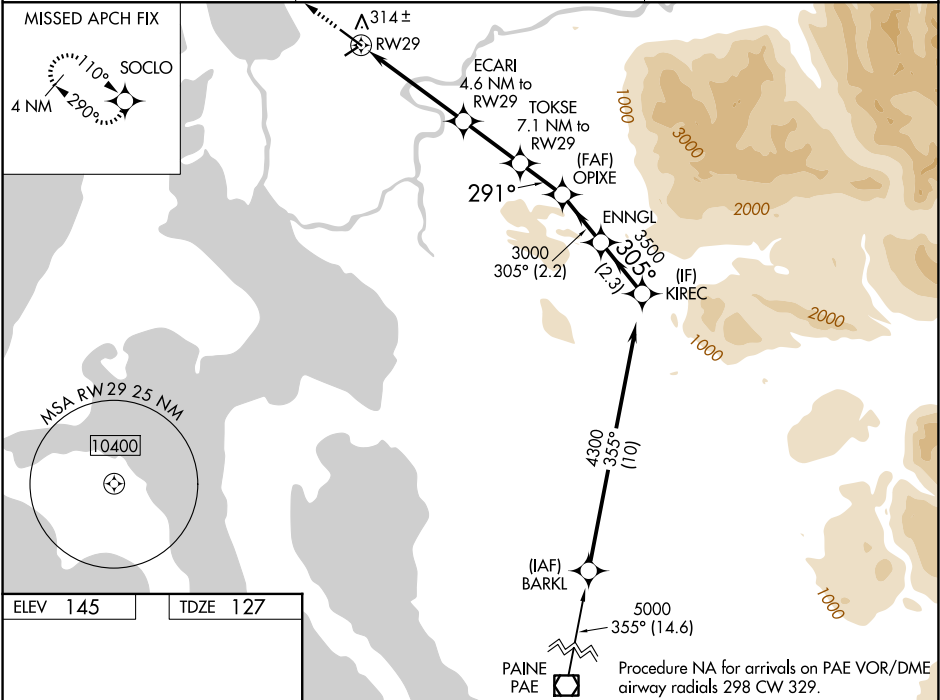

4000		SOCLO			
*LNAV only		*1.4 NM to RW29		GP 3.00° TCH 42	
ECARI 4.6 NM to RW29		TOKSE 7.1 NM to RW29		OPIXE 3000	
1600*		2400*		3000	
1.4 NM		3.2 NM		2.5 NM	
1.9 NM		2.2 NM		2.3 NM	
CATEGORY	A	B	C	D	
LPV DA	377-7⁄8		250 (300-7⁄8)		
LNAV/VNAV DA	475-1¼		348 (400-1¼)		
LNAV MDA	580-1	453 (500-1)	580-1⅓	453 (500-1⅓)	