

WAAS CH 56614 W22A	APP CRS 220°	Rwy Idg 5500 TDZE 13 Apt Elev 13
--	------------------------	---

RNAV (GPS) RWY 22


ORANGE COUNTY (OR.G)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Jack Brooks Rgnl altimeter setting and increase all DA 32 feet and all MDA 40 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ mile, and LNAV and Circling Cat C visibility ½ mile. Baro-VNAV and VDP NA when using Jack Brooks Rgnl altimeter setting. Circling NA to Rwy 13/31.

MISSED APPROACH: Climb to 2000 direct KEDKY and left turn via track 116° to POPEY and hold.

AWOS-3 118.975	HOUSTON APP CON 121.3 377.1	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

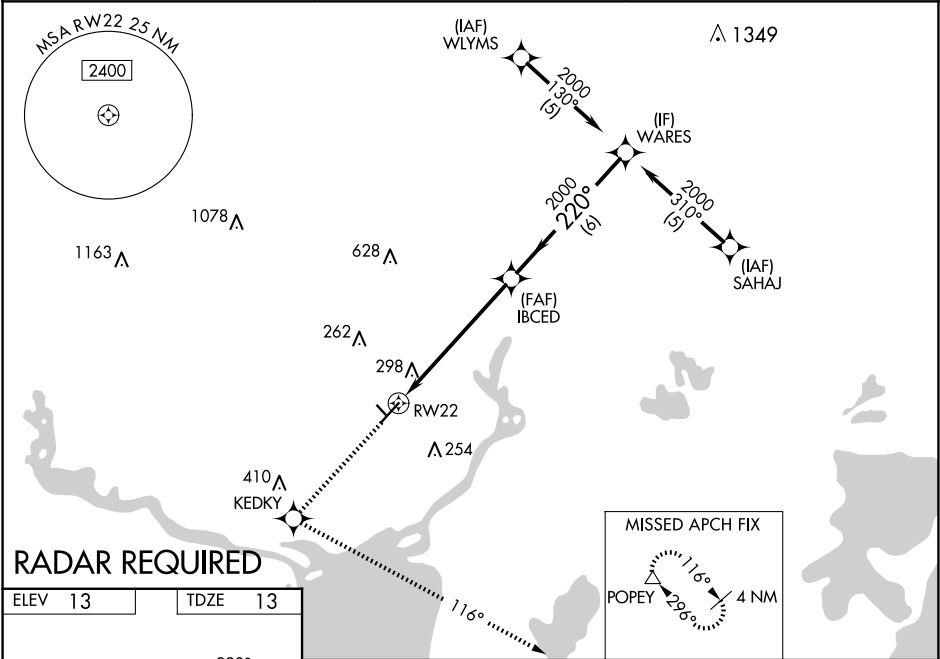

RADAR REQUIRED

ELEV 13 TDZE 13

220° to RW22

3000-50

5500 X 75

31

4

MIRL Rwy 4-22 0

REIL Rwy 4 and 22 0

2000	KEDKY	POPEY	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 21).	
*LNAV only		1.8 NM to RW22	IBCED	WARES
RW22		1.8 NM	4.2 NM	6 NM
CATEGORY	A	B	C	D
LPV DA	329-1		316 (400-1)	NA
LNAV/VNAV DA	674-2 ¼		661 (700-2 ¼)	NA
LNAV MDA	600-1	587 (600-1)	600-1 ½ 587 (600-1 ½)	NA
CIRCLING	660-1	647 (700-1)	660-1 ¾ 647 (700-1 ¾)	NA