

WAAS CH 99605 W07A	APP CRS 071°	Rwy Ldg 5008 TDZE 5 Apt Elev 5
--	------------------------	---

RNAV (GPS) RWY 7

THE FLORIDA KEYS MARATHON INTL (MTH)


RNP APCH-GPS

▼ Baro-VNAV and VDP NA when using Key West Inll altimeter setting. Rwy 7 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Key West Inll altimeter setting: increase LPV DA to 482 feet, LNAV/VNAV DA to 534 feet, increase LPV and LNAV/VNAV all Cts visibility $\frac{1}{4}$ SM, increase all MDAs 100 feet and LNAV Cat C/D and Circling Cat C visibility $\frac{1}{4}$ SM and Circling Cat D $\frac{1}{2}$ SM.

MISSED APPROACH: Climb to 2000 direct LOGEY and hold.

ASOS
135.525


MIAMI CENTER
133.5 306.9

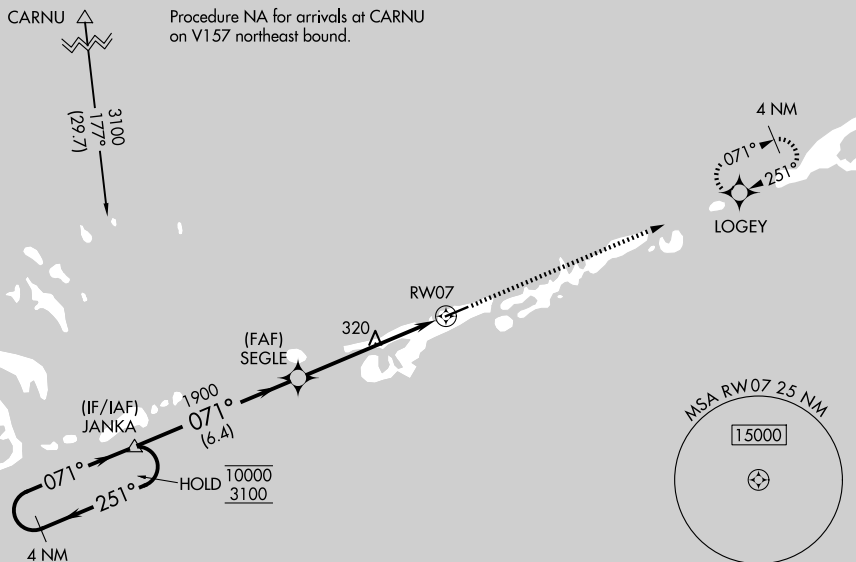UNICOM
122.975 (CTAF) **L**


SE-3, 22 JAN 2026 to 19 FEB 2026

SE-3, 22 JAN 2026 to 19 FEB 2026

ELEV	5	D	TDZE	5
------	---	----------	------	---

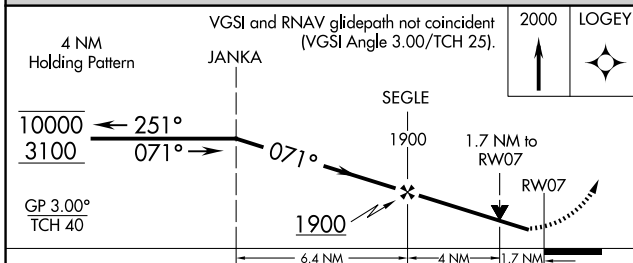

CATEGORY		A	B	C	D
LPV	DA	389-1 $\frac{1}{8}$ 384 (400-1 $\frac{1}{8}$)			
INAV/ VNAV	DA	441-1 $\frac{1}{4}$ 436 (500-1 $\frac{1}{4}$)			
INAV	MDA	600-1 595 (600-1)		600-1 $\frac{3}{4}$ 595 (600-1 $\frac{3}{4}$)	
CIRCLING		600-1 595 (600-1)		620-1 $\frac{3}{4}$ 615 (700-1 $\frac{3}{4}$)	660-2 655 (700-2)

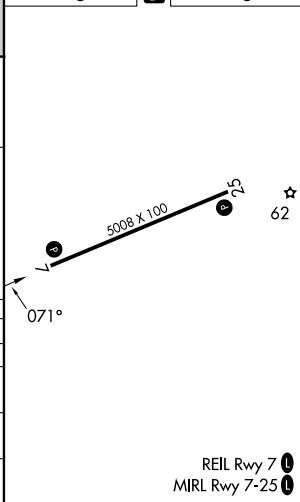

MARATHON, FLORIDA
Orig-B 09SEP21

THE FLORIDA KEYS MARATHON INTL (MTH)

24°44'N-81°03'W

RNAV (GPS) RWY 7