
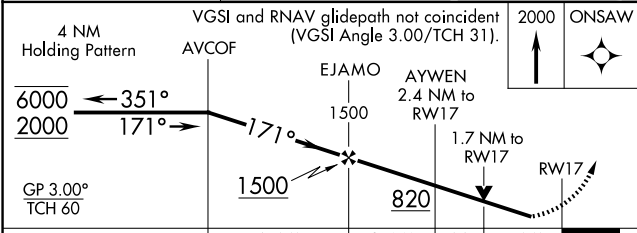



WAAS CH 93516 W17A	APP CRS 171°	Rwy Idg 5000 TDZE 5 Apt Elev 5
--	------------------------	---

RNAV (GPS) RWY 17
MARCO ISLAND EXEC (MKY)

RNP APCH-GPS.			MISSED APPROACH: Climb to 2000 direct ONSAW and hold.
▼ ▲ Baro-VNAV and VDP NA when using APF altimeter setting. Rwy 17 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C. When local altimeter setting not received, use APF altimeter setting and increase LPV DA to 326 feet; increase LNAV/VNAV DA to 484 feet; increase all MDAs 40 feet and visibility Cat C ¼ SM.			
AWOS-3PT 120.075	FORT MYERS APP CON ★ 124.125 371.85	CLNC DEL 120.8	UNICOM 122.7 (CTAF) 0

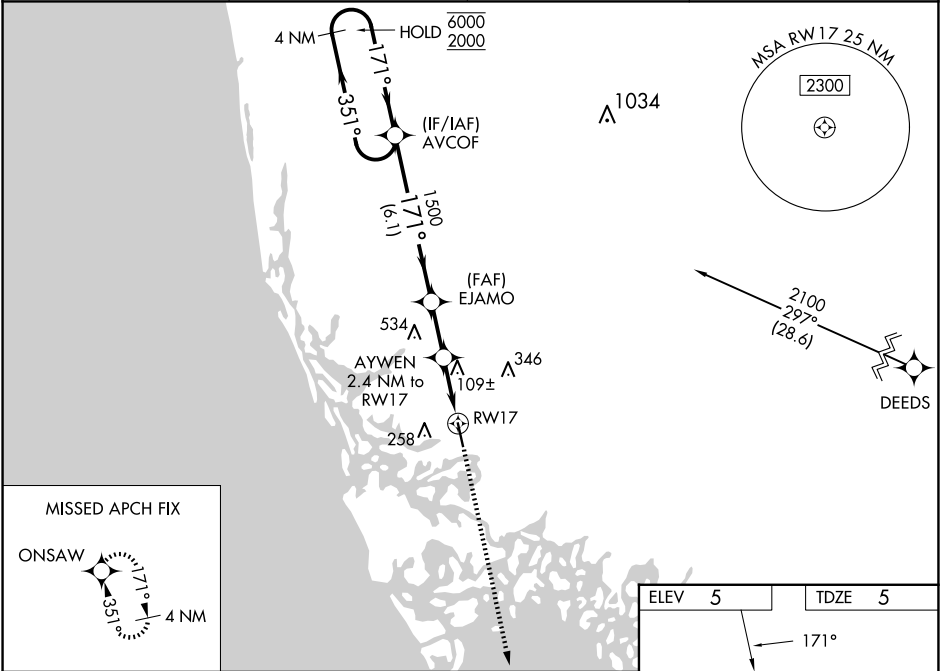

CATEGORY	A	B	C	D
LPV DA	300-1 295 (300-1)			
LNAV/VNAV DA	458-1½ 453 (500-1½)			
LNAV MDA	560-1 555 (600-1)	560-1½ 555 (600-1½)	560-1¾ 555 (600-1¾)	560-2 555 (600-2)
CIRCLING	620-1 615 (700-1)	660-1¾ 655 (700-1¾)	840-2¾ 835 (900-2¾)	840-3 835 (900-3)

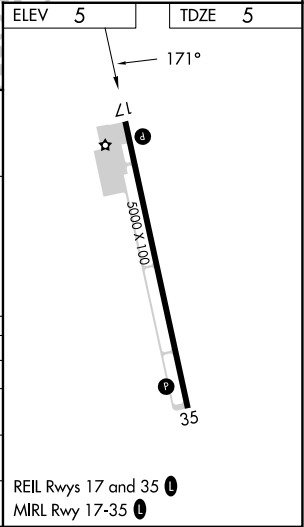

SE-3, 22 JAN 2026 to 19 FEB 2026

SE-3, 22 JAN 2026 to 19 FEB 2026