

WAAS CH 56231 W13A	APP CRS 133°	Rwy Ldg TDZE 582 Apt Elev 588
--	------------------------	---

RNAV (GPS) RWY 13

COURTLAND (9A4)

RNP APCH - GPS.


▼

⚠

Baro-VNAV and VDP NA when using MSL altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter not received, use MSL altimeter setting and increase LPV DA to 820 feet; increase LNAV/VNAV DA to 1113 feet and all visibilities ½ SM; increase all MDAs 40 feet and LNAV visibility Cat C and D ½ SM, and Circling visibility Cat D ¼ SM.

MISSED APPROACH:
Climb to 2700 direct DABIE and hold.

AWOS-3P 118.525	HUNTSVILLE APP CON ★ 118.05 239.0	UNICOM 122.7 (CTAF) 0
---------------------------	---	---------------------------------

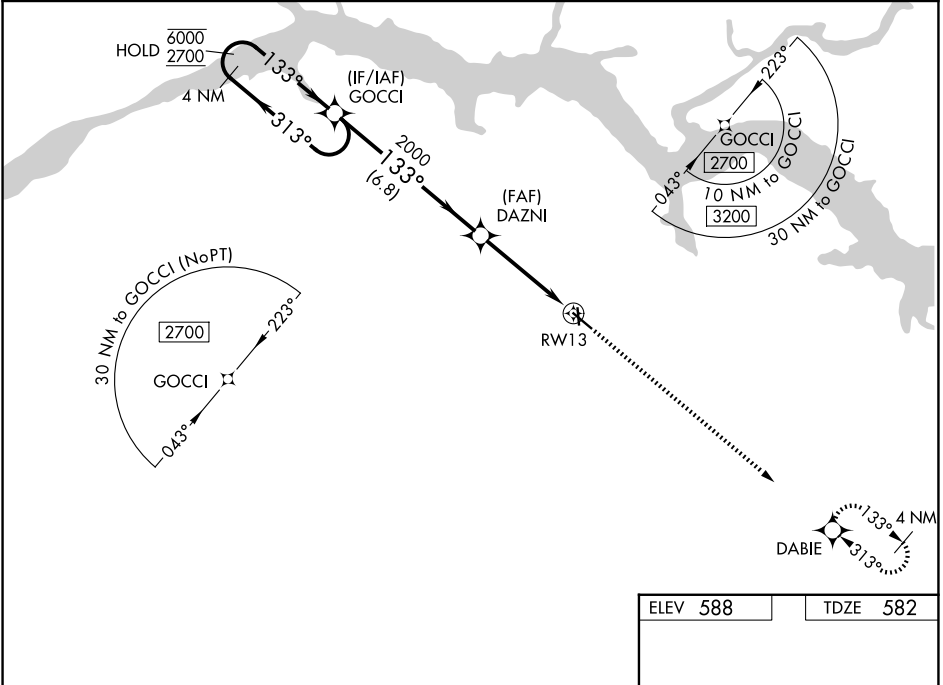

4 NM Holding Pattern

GOCCI

6000
2700

← 313°
→ 133°

GP 3.00°
TCH 40

DAZNI

2000

1.4 NM to RW13

RW13

6.8 NM


2.9 NM

1.4

2700

DABIE

CATEGORY	A	B	C	D
LPV DA		782-¾	200 (200-¾)	
LNAV/VNAV DA		1075-1⅓	493 (500-1⅓)	
LNAV MDA	1080-1	498 (500-1)	1080-1⅓	498 (500-1⅓)
CIRCLING	1160-1 572 (600-1)	1240-1 652 (700-1)	1260-2 672 (700-2)	1360-2½ 772 (800-2½)

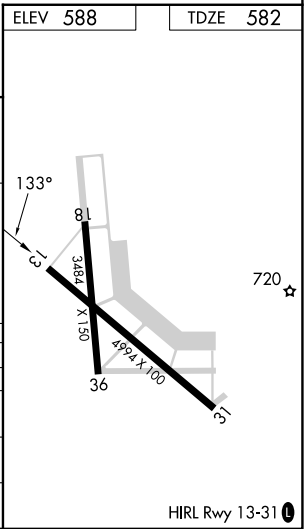

SE-4, 22 JAN 2026 to 19 FEB 2026

SE-4, 22 JAN 2026 to 19 FEB 2026