

WAAS	Rwy Ldg	3900
CH 50529	TDZE	2247
W30A	Apt Elev	2264

APP CRS
302°

RNAV (GPS) RWY 30

SHER-WOOD (PWD)

RNP APCH-GPS.



 Circling Rwy 8, 26 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use Williston altimeter setting.

MISSED APPROACH: Climb to 2900 then climbing right turn to 5000 direct BEYYA and hold.

AWOS-3PT
135.025

SALT LAKE CENTER
126.85 305.2

UNICOM
122.8 (CTAF) 

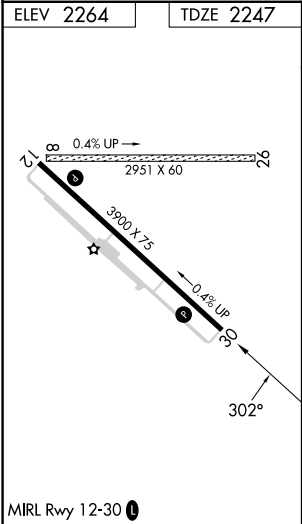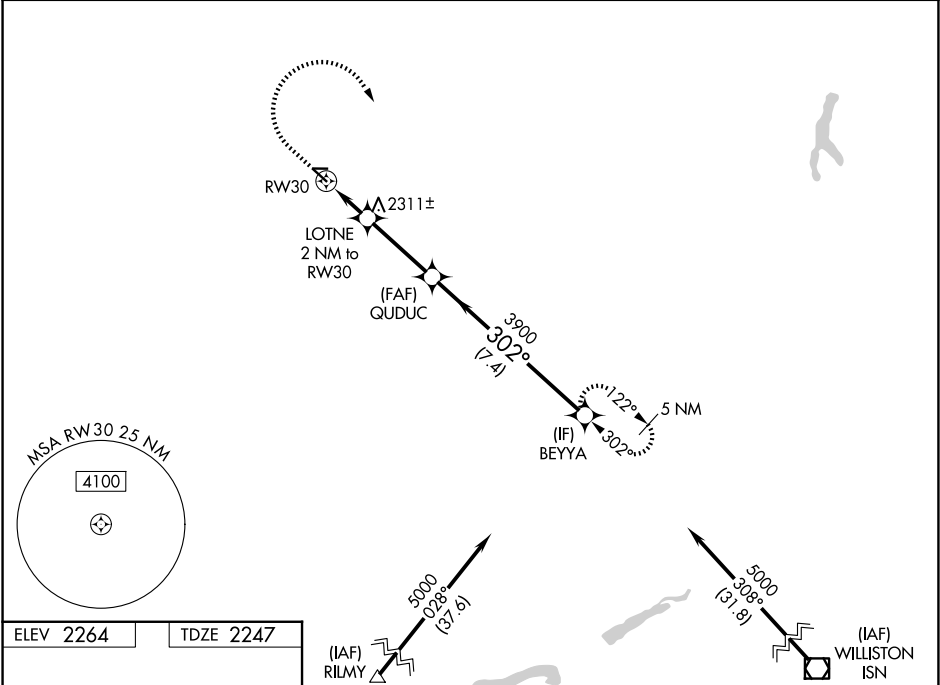

2900	5000	BEYYA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 28).		BEYYA
↑	↪	✧	LOTNE	QUDUC	5000
			2 NM to RW30	3900	302°
			1.3 NM to RW30	2900	
			1.3 NM	0.7 NM	3.1 NM
					7.4 NM
					GP 3.00°
					TCH 34
CATEGORY	A	B	C	D	
LPV DA		2562-3/4	315 (300-3/4)		
LNAV/VNAV DA		2612-1	365 (400-1)		
LNAV MDA	2680-1	433 (500-1)	2680-1 1/4	433 (500-1 1/4)	
CIRCLING	2780-1	516 (600-1)	2880-1 3/4	3100-2 3/4	836 (900-2 3/4)