

LOC/DME I-BBG 111.35 Chan 50(Y)	APP CRS 323°	Rwy Ldg TDZE Apt Elev 7140 1302 1302
---	------------------------	--

ILS or LOC RWY 32
BRANSON (BBG)


NA

Inop table does not apply. When local altimeter setting not received, use Harrison altimeter setting and increase S-ILS 32 DA to 1549 feet; increase all MDAs 60 feet and S-LOC 32 visibility Cat C/D and Circling visibility Cat C ¼ SM. VDP NA when using Harrison altimeter setting.

MALSF

MISSED APPROACH: Climb to 4000 on heading 315° and HRO VOR/DME R-339 to WUTIB INT/HRO 25.3 DME and hold.

ATIS 124.625	SPRINGFIELD APP CON 126.35	BRANSON TOWER★ 128.15 (CTAF)	GND CON 118.4	UNICOM 122.95
------------------------	--------------------------------------	--	-------------------------	-------------------------

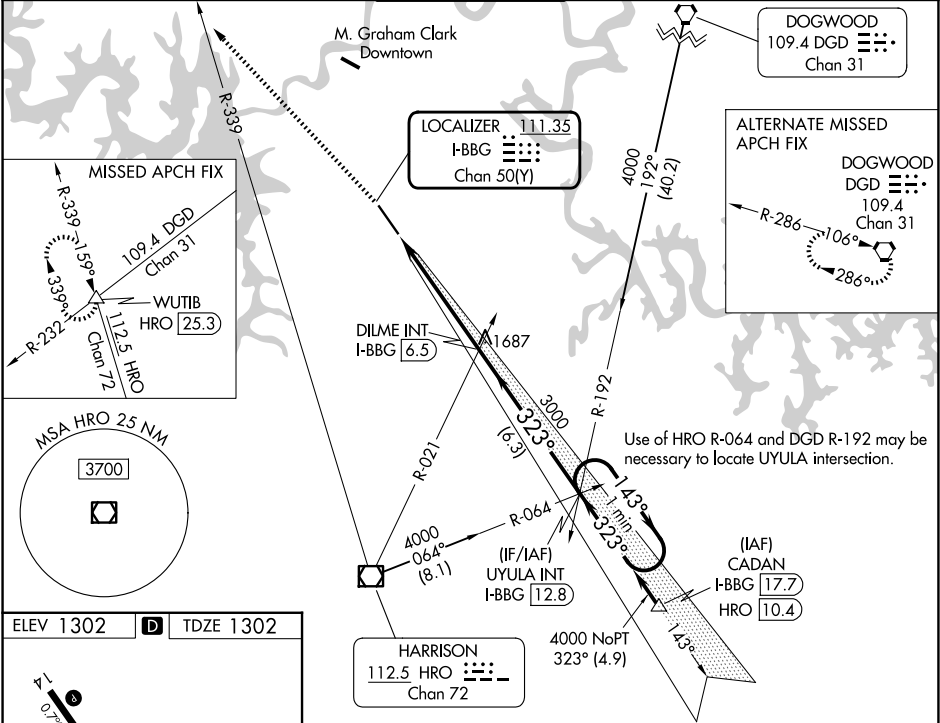

ELEV 1302 TDZE 1302

D

TWR ★

REIL Rwy 14

HIRL Rwy 14-32

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

	4000	HRO R-339	WUTIB		UYULA INT I-BBG 12.8	One Minute Holding Pattern
	hdg 315°					
	*LOC only.	*I-BBG 2.7				
		I-BBG 1.4				
CATEGORY	A	B	C	D		
S-ILS 32		1502-1	200 (200-1)			
S-LOC 32		1760-1	458 (500-1)			
CIRCLING	1760-1 458 (500-1)	1900-1 598 (600-1)	2220-2¾ 918 (1000-2¾)	2220-3 918 (1000-3)		

NC-3, 22 JAN 2026 to 19 FEB 2026

NC-3, 22 JAN 2026 to 19 FEB 2026