

FORT BLISS, TEXAS

ILS or LOC RWY 22

I-BIF LOC/DME 110.9 Chan 46	APCH CRS 216°	Rwy Idg 13,553 TDZE 3947 Arpt Elev 3947
---	-------------------------	--

[USA]

BIGGS AAF (KBIF)

RADAR required when R-5103-A,B,C, R-5107K are active.	SSALR	MISSED APPROACH: Climb to 4600, then climbing left turn to 9000 direct ELP VORTAC. Proceed outbound ELP R-040 to PIERS intersection and hold. Continue climb in hold to 9000.
---	-------	---


EL PASO ATIS 120.0 254.3	EL PASO APP 119.15 353.5 (S of V16) 124.25 298.85 (N of V16)	TOWER 127.9 342.25	GND CON 121.6 251.125	ASR
------------------------------------	--	------------------------------	---------------------------------	-----

Arrivals expect RADAR vectors to final when restricted areas are active.

Procedure NA via V-94-611, T317 westbound without holding at MOLLY. ATC clearance required.


Procedure NA via V-560 eastbound without holding at PIERS. ATC clearance required.

Inop table does not apply.

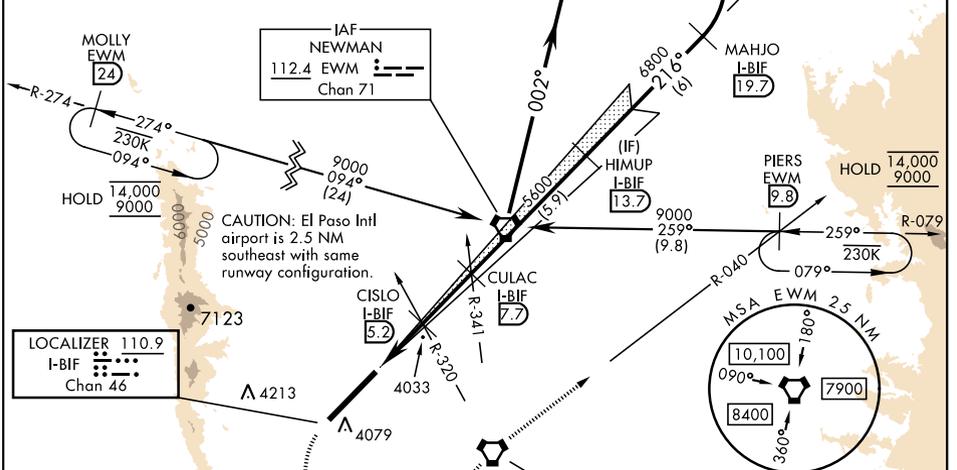

LOCALIZER 110.9 I-BIF Chan 46	ELEV 3947	TDZE 3947
-------------------------------	-----------	-----------

EMERG SAFE ALT 100 NM 13,100	EL PASO 115.2 ELP Chan 99
------------------------------	---------------------------

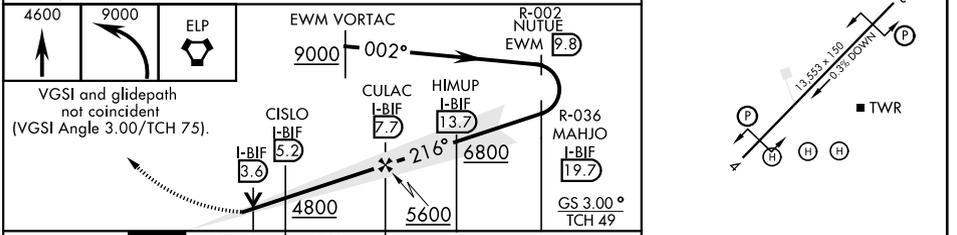

CATEGORY	A	B	C	D	E
S-ILS 22		4147- $\frac{3}{4}$	200	(200- $\frac{3}{4}$)	
S-LOC 22		4300-1	353	(400-1)	
CIRCLING*	4380-1 433 (500-1)	4400-1 453 (500-1)	4560-1 $\frac{3}{4}$ 613 (700-1 $\frac{3}{4}$)	4560-2 613 (700-2)	4560-2 $\frac{1}{2}$ 613 (700-2 $\frac{1}{2}$)

HIRL Rwy 04-22 REIL Rwy 04, 22					
FAF to MAP 5.0 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

FORT BLISS, TEXAS 31° 51' N - 106° 23' W BIGGS AAF (KBIF)

Orig 25JAN24

ILS or LOC RWY 22

SC-3, 19 FEB 2026 to 19 MAR 2026

SC-3, 19 FEB 2026 to 19 MAR 2026