

WAAS CH 82507 W06A	APP CRS 071°	Rwy Ldg 8566 TDZE 119 Apt Elev 128
--	------------------------	---

RNAV (GPS) Y RWY 6L


LOS ANGELES INTL (LAX)

▽ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C (41°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. Simultaneous approach authorized.

MALSR 

MISSED APPROACH: Climb to 3000 direct ZANAV and track 042° to AMTRA and hold.

D-ATIS 133.8	SOCAL APP CON 124.3 363.2 (APCH from W) 124.9 269.0 (090°-224°) 124.5 235.975 (225°-044°) 128.5 360.7 (045°-089°)	LOS ANGELES TOWER 133.9 239.3 (N) 120.95 379.1 (S)	GND CON 121.65 327.0 (N) 121.75 327.0 (S) 121.4 327.0 (W)
------------------------	---	--	---

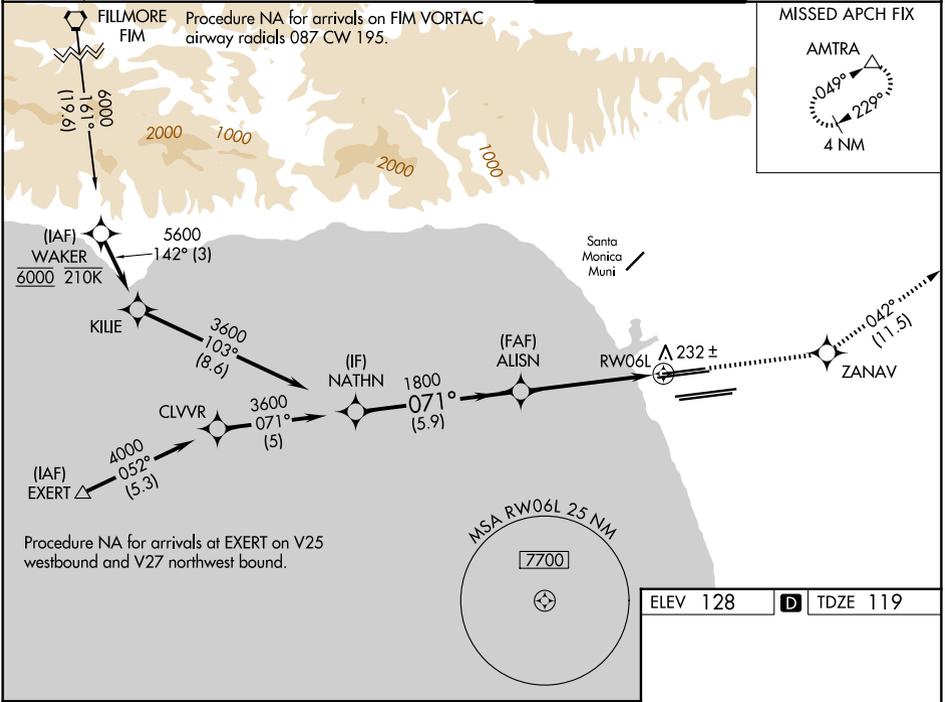


VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 77).

NATHN	ALISN	ZANAV	AMTRA
3600	1800	3000	
GP 3.00° TCH 55	071°	tr 042°	
5.9 NM	4.1 NM	1 NM	
CATEGORY	A	B	C
LPV DA	369/24		250 (300-½)
LNAV/VNAV DA	411/24		292 (300-½)
LNAV MDA	500/24 381 (400-½)		500/35 381 (400-¾)

* 1 NM to RW06L

* LNAV only

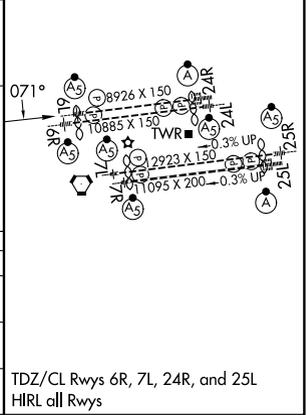

SW-3, 19 FEB 2026 to 19 MAR 2026

SW-3, 19 FEB 2026 to 19 MAR 2026