

RNAV (RNP) X RWY 18R

FREDERICK W SMITH INTL (MEM)


APP CRS	Rwy Ldg	9320
180°	TDZE	295
	Apt Elev	341

▼ For uncompensated Baro-VNAV systems, procedure NA below -9°C (16°F) or above 48°C (118°F). Simultaneous approach authorized. GPS required. Missed approach requires RNP less than 1.0. Use of FD or AP required during simultaneous operations.


MALSR  MISSED APPROACH: Climb to 5000 on track 180° to ZUPIN and on track 180° to HARUB and on track 180° to JAGUR and on track 223° to JEPOB and hold.

MEMPHIS APP CON	MEMPHIS TOWER	GND CON
119.1 291.6 (176°-355°)	118.3 257.8 (Rwy 9-27)	121.0 379.2 (Rwy 9-27)
125.8 338.3 (356°-175°)	119.7 257.8 (Rwys 18C-36C, 18L-36R)	121.9 379.2 (Rwys 18C-36C, 18L-36R)
	128.425 257.8 (Rwy 18R-36L)	121.65 379.2 (Rwy 18R-36L)


D-ATIS
127.75

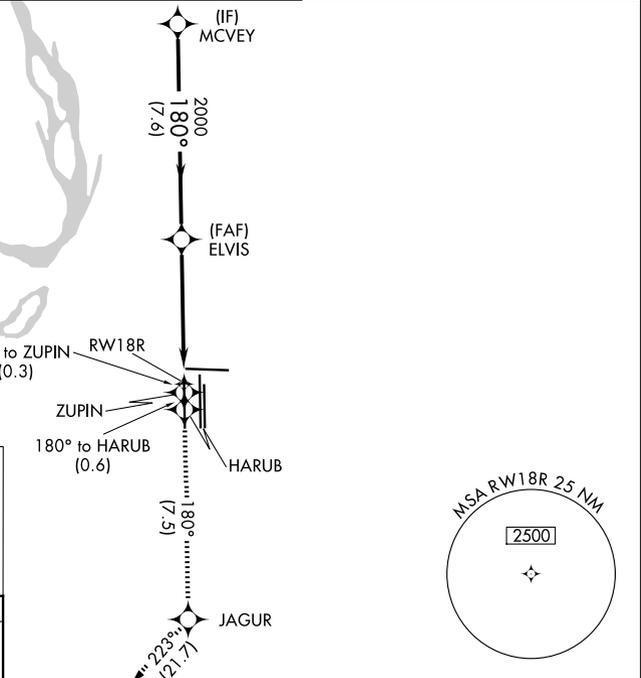

ELEV	341	TDZE	295
------	------------	------	------------

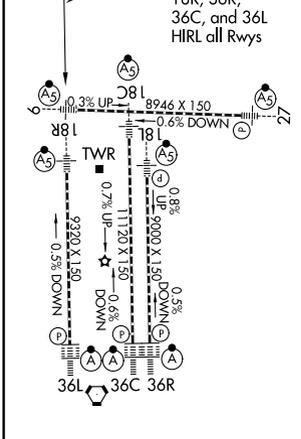

5000	tr 180°	ZUPIN	tr 180°	HARUB	tr 180°	JAGUR	tr 180°	JEPOB	tr 223°
------	---------	-------	---------	-------	---------	-------	---------	-------	---------

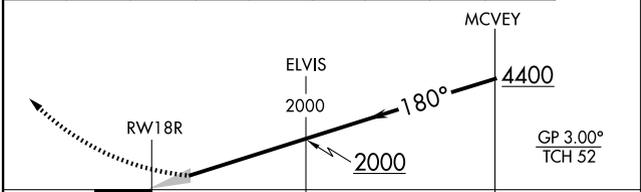

CATEGORY	A	B	C	D
RNP 0.14 DA		737/45	442 (400-7/8)	

AUTHORIZATION REQUIRED

SE-1, 19 FEB 2026 to 19 MAR 2026

SE-1, 19 FEB 2026 to 19 MAR 2026