

WAAS CH 42746 W16A	APP CRS 164°	Rwy Ldg TDZE 4226 Apt Elev 4231
--	------------------------	--

RNAV (GPS) Y RWY 16R

SALT LAKE CITY INTL (SLC)


RNP APCH - GPS.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 50°C. For inop ALS, increase LPV* Cat E visibility to RVR 4000, increase LPV Cat E visibility to RVR 4500, increase LNAV/VNAV Cat E visibility to RVR 6000, increase LNAV# Cat E visibility to 1 3⁄8 SM, increase LNAV Cats C/D visibility to 1 3⁄8 SM, and increase LNAV Cat E visibility to 2 1⁄2 SM. Cat E restricted to USAF/USN aircraft.

ALSIF-2

MISSED APPROACH: Climb to 4700 then climbing right turn to 8900 direct SLOPS and on track 252° to STACO and hold, continue climb-in-hold.
*Missed approach requires minimum climb of 225 feet per NM to 6400 for Cat E aircraft.
#Missed approach requires minimum climb of 210 feet per NM to 6200 for Cat E aircraft.

D-ATIS 124.75 125.625	SALT LAKE CITY APP CON 125.7 284.6	SALT LAKE CITY TOWER 132.65 336.4	GND CON 123.775 348.6	CLNC DEL 127.3 379.975	CPDLC
---------------------------------	--	---	---------------------------------	----------------------------------	-------

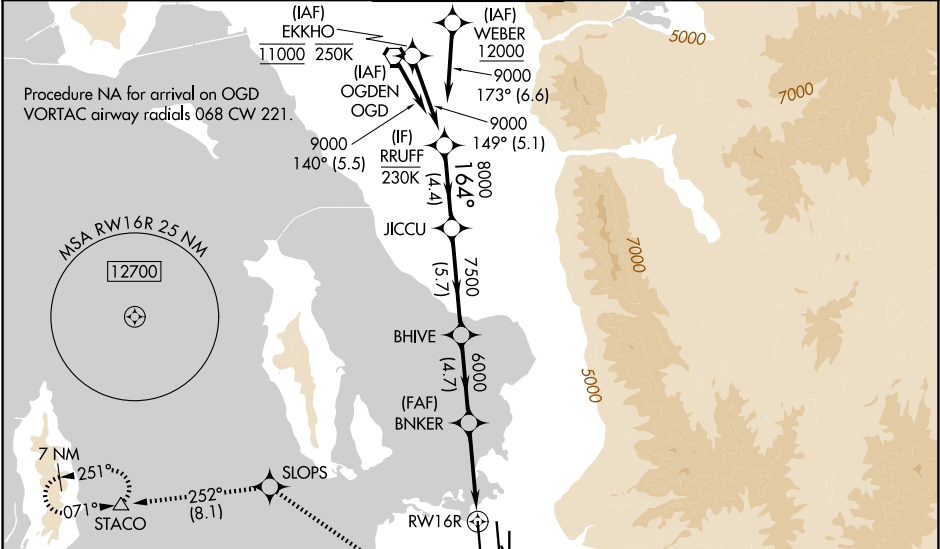

ELEV 4231 D TDZE 4226

164°

89L

19L

34L

34R

35L

TWR

STAR

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).		4700	8900	SLOPS	STACO
RRUFF		↑	↷	✧	tr 252°
JICCU					△
9000		164°			
8000		7500		1.4 NM to RW16R	
GP 3.00°		6000		RW16R	
TCH 54		4.4 NM		5.7 NM	
		4.7 NM		4 NM	
		1.4			
CATEGORY	A	B	C	D	E
LPV DA*	NA				4426/18 200 (200-½)
LPV DA	4426/18 200 (200-½)				4489/20 263 (300-½)
LNAV/VNAV DA	4620/35 394 (400-¾)				
LNAV MDA#	NA				4740/55 514 (600-1)
LNAV MDA	4740/24 514 (600-½)	4740/55 514 (600-1)		5000-1¾ 774 (800-1¾)	

HIRL all Rwys

TDZ/CL Rwys 16L, 16R, 17, 35, 34L, and 34R

SW-4, 19 FEB 2026 to 19 MAR 2026

SW-4, 19 FEB 2026 to 19 MAR 2026