


WAAS CH 82202 W16A	APP CRS 157°	Rwy Ldg 6224 TDZE 644 Apt Elev 645
----------------------------------------	------------------------	---------------------------------------------------------------

RNAV (GPS) RWY 16

ADDISON (ADS)



RNP APCH-GPS. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 16 helicopter visibility reduction below 1 SM NA. Inop table does not apply to LPV all Cats, and LNAV Cats A/B. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM, and LNAV Cats C/D to 1¾ SM.	MALSR 	MISSED APPROACH: Climb to 3000 direct VEYXE and on track 076° to TRISS and hold.
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------	----------------------------------------------------------------------------------

ATIS 133.4	LONE STAR APP CON 124.3 282.275	ADDISON TOWER ★ 126.0 (CTAF) 239.0	GND CON 121.6	UNICOM 122.95
----------------------	-------------------------------------------	----------------------------------------------	-------------------------	-------------------------


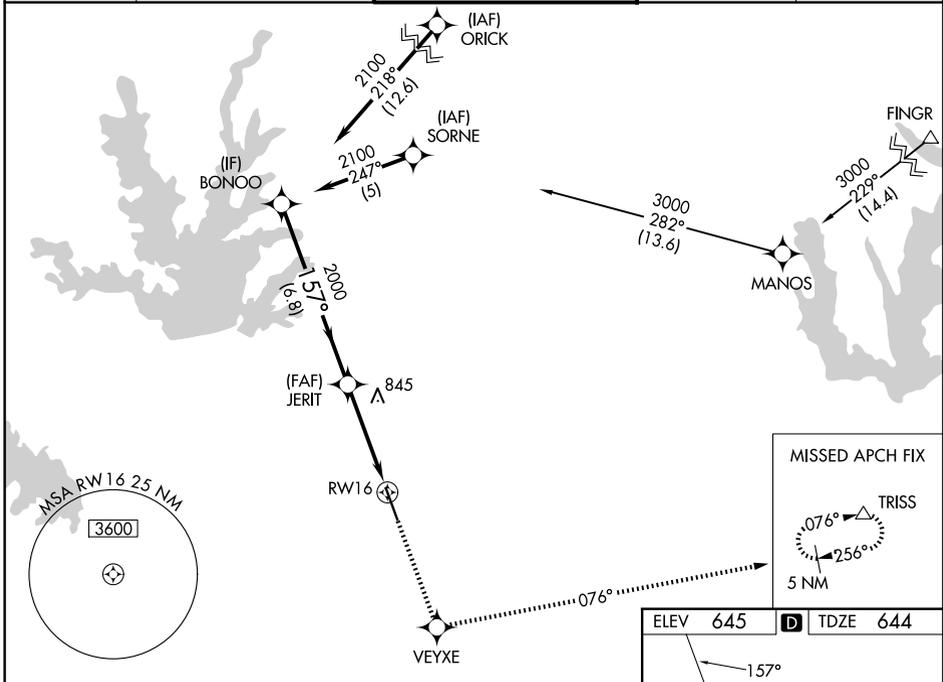


SC-2, 19 FEB 2026 to 19 MAR 2026

SC-2, 19 FEB 2026 to 19 MAR 2026



ELEV 645	D TDZE 644
----------	-------------------

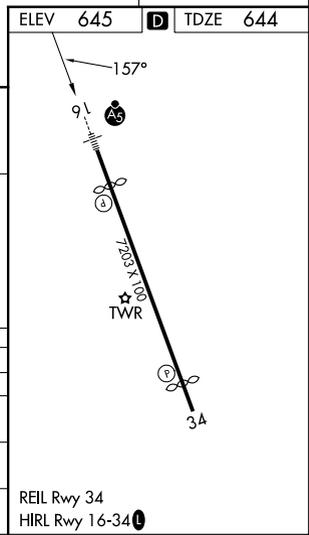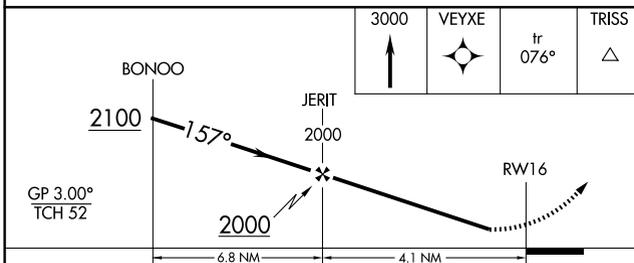

CATEGORY	A	B	C	D
LPV DA	944-1		300 (300-1)	
LNAV/VNAV DA	1077-1		433 (500-1)	
LNAV MDA	1100-1		456 (500-1)	
CIRCLING	1200-1 555 (600-1)		1280-1¼ 635 (700-1¾)	1400-2½ 755 (800-2½)

REIL Rwy 34
HIRL Rwy 16-34